




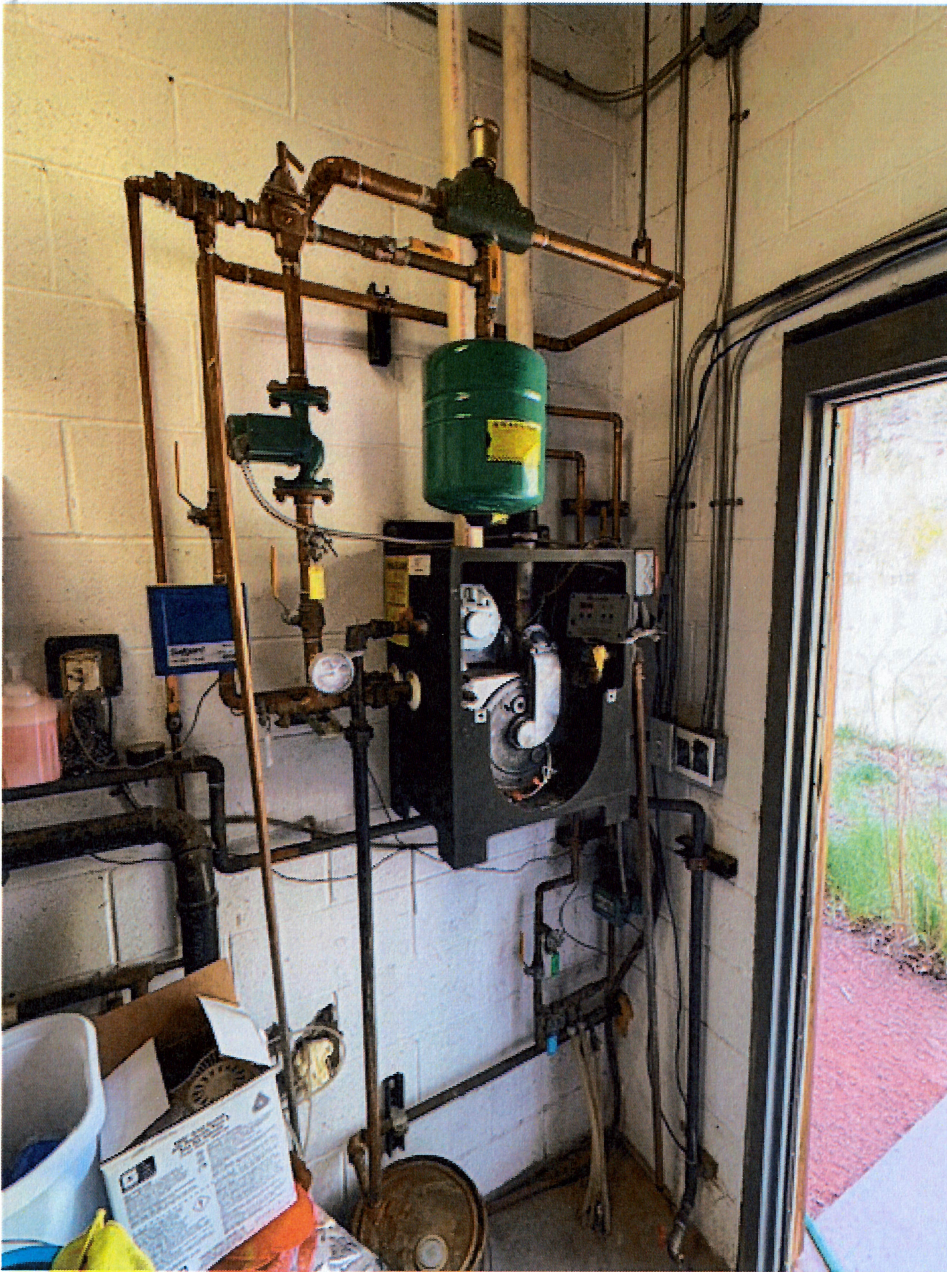

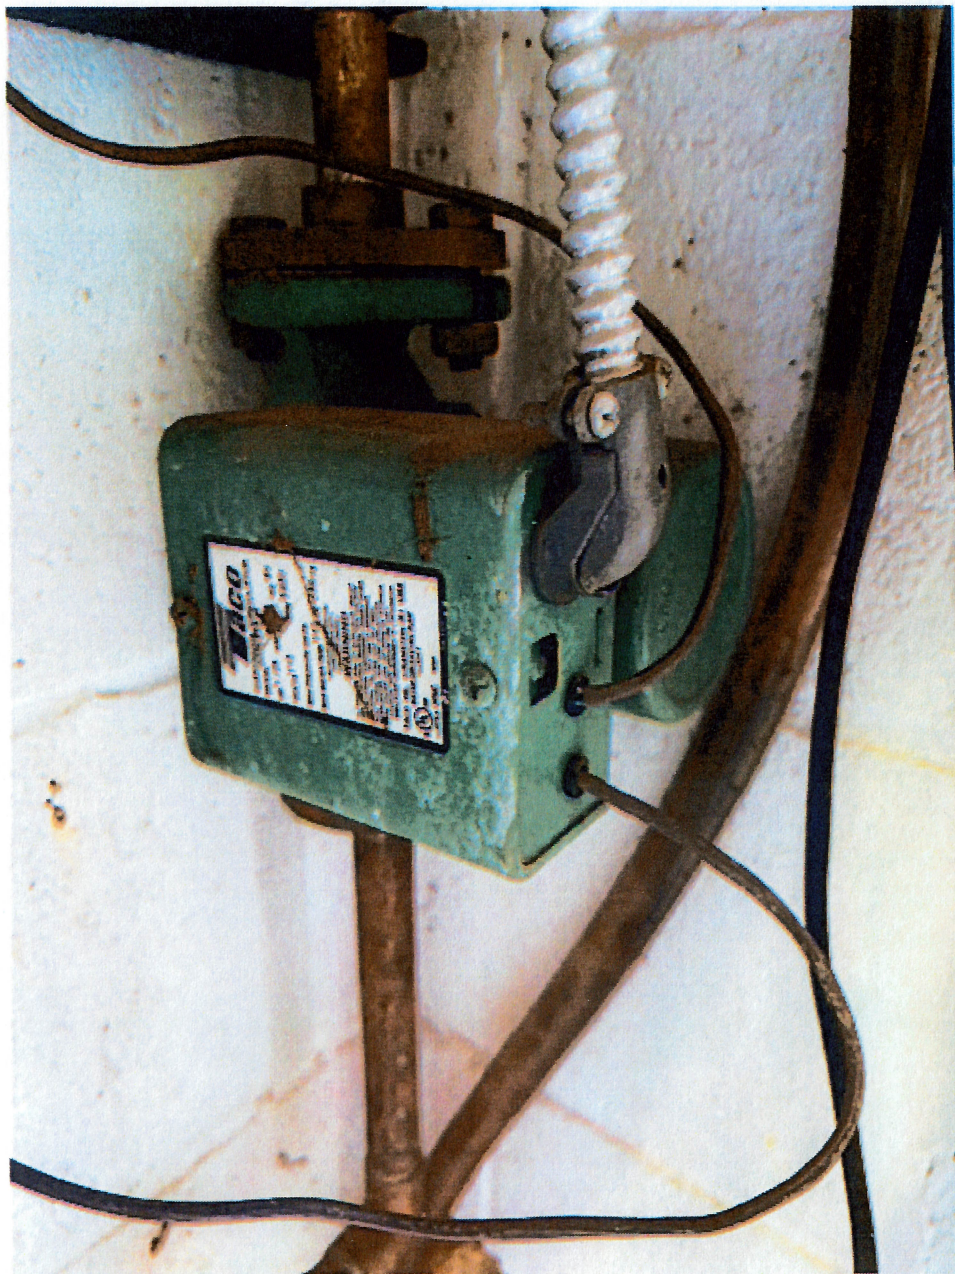

MUNCHKIN

BY: HEAT TRANSFER PRODUCTS, INC.
120 BRALEY ROAD
PO. BOX 429
EAST FREETOWN, MA 02717 USA
508-763-8071



MH27145

HOT WATER BOILER IN ACCORDANCE WITH ANSI
STANDARD FOR GAS-FIRED LOW PRESSURE STEAM
AND HOT WATER BOILERS, ANSI Z21.13a-2002, AND
CANADIAN NATIONAL STANDARD CSA 4.9a-2002.
26UB

MODEL NO.: T50M HA
SERIAL NO.: F13K0707
GAS TYPE: NATURAL
MAX INPUT RATING
BTU/HR: MIN. 20,000 - MAX. 50,000
MAX. INLET PRESSURE: 14" W.C. / 38 KILOPASCAL
MIN. INLET PRESSURE: 7" W.C. / 18 KILOPASCALS
TEST PRESSURE: 60 PSI 414 KPA
WORKING PRESSURE: 30 PSI 207 KPA
LS110052

MFG. DATE: 06/04

008

Electrical 60 Hz, 120 Volt, 3 Amperes. This appliance must be installed by
qualified and licensed personnel in accordance with local codes, or in the
absence of local codes, by the national fuel gas code, ANSI Z223.1-1999.
This appliance is for indoor installations only. Clearance to combustible
materials: 0" top, bottom, sides, and back. Front must have room for service,
24" recommended. (a combustible door or removable panel is acceptable
front clearance). This appliance has been approved for closet installation.
Do not install this appliance directly on carpeting. For installation on com-
bustible flooring directly. Category IV vent systems only.

Category IV vent systems only, PVC
must be 2 pipe sealed combustion Category IV only, PVC
must be 1/40 or 80 as per detailed instructions in manual.

FOR YOUR SAFETY

Do not use Gasoline or other
liquids in the
appliance