

REQUEST FOR BID

Asphalt Marking Services – Centerline Epoxy Striping

2026 Request for Bid TOWN OF BRECKENRIDGE - PUBLIC WORKS

The Town of Breckenridge (Town) is soliciting electronic bids from qualified parties (Contractor). To be considered, interested parties shall submit a written bid by the stated deadline, meet the established criteria as described in the instructions below, and represent their intent, proven capability and true commitment. Information submitted will be subject to verification.

Project Background:

The Town is seeking bids for asphalt marking services, 4-inch yellow centerline epoxy striping, along select Town owned and maintained roadways. In addition to 4-inch yellow centerline epoxy striping, the Town also requests pricing for 4-inch, 6 inches, and 8-inch white edge line and turn lane epoxy striping. All locations are within Town of Breckenridge city limits.

Description of Work:

Throughout Town roadways, there are several locations needing annual refreshing of epoxy striping. The roads the Town wants refreshed in 2026 are:

- Airport Rd.
- Boreas Pass Rd.
- Broken Lance.
- Club House Dr.
- Coyne Valley.
- Four O'clock Rd.
- French St.
- French Gulch Rd.
- Highlands Dr.
- High Point Rd.
- Lincoln Ave.
- Main St. (north and south) – including roundabout on north end
- Reiling Rd.
- Ridge St. south
- Royal Tiger Rd.
- Shores Ln.
- Ski Hill Rd.
- Stables Rd.
- Stan Miller Dr.
- Valley Brook Rd.
- Village Rd.
- Watson Ave.
- Wellington Rd.
-

See **Appendix A** for maps with highlighted locations for epoxy striping.

Installation Requirements:

Town staff will be completing ongoing audits of Contractor work. Failure to complete any of the below installation requirements will be the responsibility of the Contractor to repair without any additional cost or project delay to the Town. Town will not remit payment until all locations meet the requirements below.

To be considered successfully completed, each section of the roadway must be:

- Striping refreshed with CDOT spec epoxy (provide spec sheet with bid)
- Striping lined with reflective CDOT spec glass beads (provide spec sheet with bid)
- Have appropriate traffic control set out for the duration of installation
- All cones or other traffic control devices picked up by Contractor once work is complete

Responsibilities:

The Town shall be responsible for providing all communication to ensure there are no vehicles parked along roadways or right of way that could potentially interfere with contractors work plan and schedule. If vehicles are found to interfere with contractor work, it shall be the responsibility of the Town to work with local authorities to get said vehicles moved. The Town shall also be responsible for sweeping glass beads post work completion.

The contractor shall be responsible for providing all labor, tools, materials, and equipment required for infield installation of epoxy and glass beads. Contractor shall also be responsible for providing all aspects of traffic control before, during, and retrieval of devices after project completion.

Project Scheduling & Timeline:

Once under contract for the project, scheduling of work may begin. The Town desires for this work to be completed by Friday May 29th, 2026.

Due to heavy pedestrian volume and vehicular traffic, the Town requires this work to be completed after 5:00pm and all traffic control picked up by 8:00am. Work may not be completed on Friday or Saturday nights. Exceptions may be permitted only if clearly communicated to and approved by the Town of Breckenridge Town Engineer in advance. Each location, except for Main Street, does not have on street parking or other consistent use of public right of way. Work in these areas can be scheduled with minimal notice if the work is being done during the stated evening and overnight hours.

Main Street in Breckenridge presents other details for the Town to consider. Town staff requires at least five (5) business days notice to coordinate with all relevant stakeholders before Main St epoxy work can be scheduled.

Consideration for weather or other delays will be allowed when communicated to the Town with as much notice as reasonably possible.

For project scheduling, Contractor shall communicate with Steve Worrall at 970-547-7884 and/or steve@townofbreckenridge.com.

Traffic Control:

The contractor must supply traffic control plans with their bid submittal to ensure adequate safety measures are in place while completing any work. Signage indicating a work zone must be placed before work begins and after it is concluded. Traffic control devices or signage must be removed as soon as possible at the conclusion of work. Traffic control must be placed in a fashion that is directly connected to the workplan. Road closures are not necessary for this project but a traffic control and traffic safety plan that takes careful consideration for vehicle and pedestrian traffic must be part of the project submission. All traffic control devices shall be provided by the contractor. All traffic control and signs shall be in good repair. All traffic

control devices and layout shall conform to the Manual on Uniform Traffic Control Devices (MUTCD). The Contractor shall submit a Traffic Control Plan to the Town for approval with their RFB submittal. Work shall not begin on the Project until the Contractor receives written approval of the Traffic Control Plan from the Town. Within worksite, all individuals performing work must be wearing ANSI Type R Class 2 hi visibility outer wear at all times.

The above guidelines will be closely monitored, and it is a requirement of the contractor to adjust or communicate needs directly to the Town. Adherence to the above expectations is solely the responsibility of the contractor.

This Contract or any interest therein, may not be assigned without prior, written consent of the Town Representative. The Town may request supplemental information or clarification of stated requirements provided up until a final award is made. The Town reserves the right to reject all bids received as a result of this request, to waive formalities, informalities, or irregularities, technical defects or clerical errors in any bid, as the interest of the Town may require.

BID INSTRUCTIONS

Asphalt Marking Services – Centerline Epoxy Striping

2026 Request for Bid TOWN OF BRECKENRIDGE - PUBLIC WORKS

The purpose of the following instructions is to furnish general information to prospective bidders. These instructions are not intended to limit the bidder but instead provide information as to the basic minimal requirements. Bidders are encouraged to read the full Request for Bid to ensure that the bid submitted is tailored specifically to meet the expectations of the Town.

Issuing Office

This request for bid is issued by the Public Works Department, Steve Worrall, Streets Assistant Manager for the Town of Breckenridge.

All project questions must be submitted via email to Steve Worrall on March 2nd, 2026, by 8:00am. Questions will be answered and posted to the RFB as an addendum within 48 hours of the above stated time. Questions must be submitted electronically via email. If no addendum is posted to the website, no questions were received.

There will not be an in-person or virtual pre bid meeting for this RFB.

Questions can be directed to Steve Worrall, Streets Assistant Manager for the Town of Breckenridge at:
SteveW@townofbreckenridge.com

Submission of Bids

Only electronic bid submittals will be accepted. All bids must be emailed to:

Websiteclerk@townofbreckenridge.com
SteveW@townofbreckenridge.com

- All bids shall have the email subject of “**2026 RFB – Asphalt Marking Services – Centerline Epoxy Striping**” with the contractors name immediately following.
 - Submissions must have the completed bid documents attached to it. Links to other cloud-based servers will not be accepted.
 - **Deadline for submission of bids shall be Monday, March 9th, 2026, at 8:00am**
 - All bids shall include a completed application. All bids must be prepared and signed by the bidder(s). Such bids become the property of the Town and will not be returned. Incomplete applications may not be considered for award.
 - Any bids received after the time and date established as the deadline for submission shall not be considered. Any bid may be withdrawn prior to the scheduled time for opening of bids.
-

Bid Expenses

Expense for developing the bid is entirely the responsibility of the bidder and will not be reimbursed in any way by the Town.

Evaluation Criteria

Criteria to be used in reviewing bids for the awarding of the contract will include price and ability to meet or exceed technical requirements as well as based on delivery date. The Town shall have the right to select the most qualified bidder based upon the evaluation criteria.

Rejection of Bids

The Town reserves the right to reject any and all bids received as a result of this request, to waive formalities, informalities, or irregularities, technical defects or clerical errors in any bid, as the interest of the Town may require. Award decisions are final. All bids shall remain firm for thirty (30) calendar days after bid opening.

Colorado Open Records Law

Bidders are advised that the bids are subject to public disclosure under Colorado Law and will not be treated as confidential. All materials submitted become the property of the Town and may be made public in whole or in part at the discretion of the Town with two notable exceptions. Information marked confidential such as trade secrets and references shall be treated as privileged information and confidential commercial information under the Colorado Open Records Law.

APPLICATION

Asphalt Marking Services – Centerline Epoxy Striping

2026 Request for Bid

TOWN OF BRECKENRIDGE

The Bidder hereby certifies that all statements and all answers to questions herein are true and correct.

Statements must be complete, accurate, and in the form requested.

BIDDER INFORMATION

Contact Information	
Bidder Name	
Mailing Address	
Physical Address	
Phone Number	
Email Address	

BID AMOUNT

Bid amount entered MUST be total cost. No additional fees or costs are allowed outside the cost listed below.

Application Type	Total LF (approximate)	Cost per LF	Total Cost
4 inch yellow	115,000 lf		
4 inch white	35,000 lf		
6 inch white	4,500 lf		
8 inch white	3,000 lf		
		Total Cost:	\$

PRODUCT SPECIFICATION

All bid application packets must include Epoxy specification sheets and Glass Bead specification sheets.

WARRANTY

All warranty work shall be done at bidder's expense to include transportation to and from repair facility or completing the repair on site.


ACKNOWLEDGEMENT

The submittal of this bid is duly authorized official act of the bidder, and the undersigned officer of bidder is duly authorized and designated to submit this bid to the Town of Breckenridge, this _____ day of _____, 2026

By Company: _____


Signature of Bidder: _____

Title: _____ Date: _____

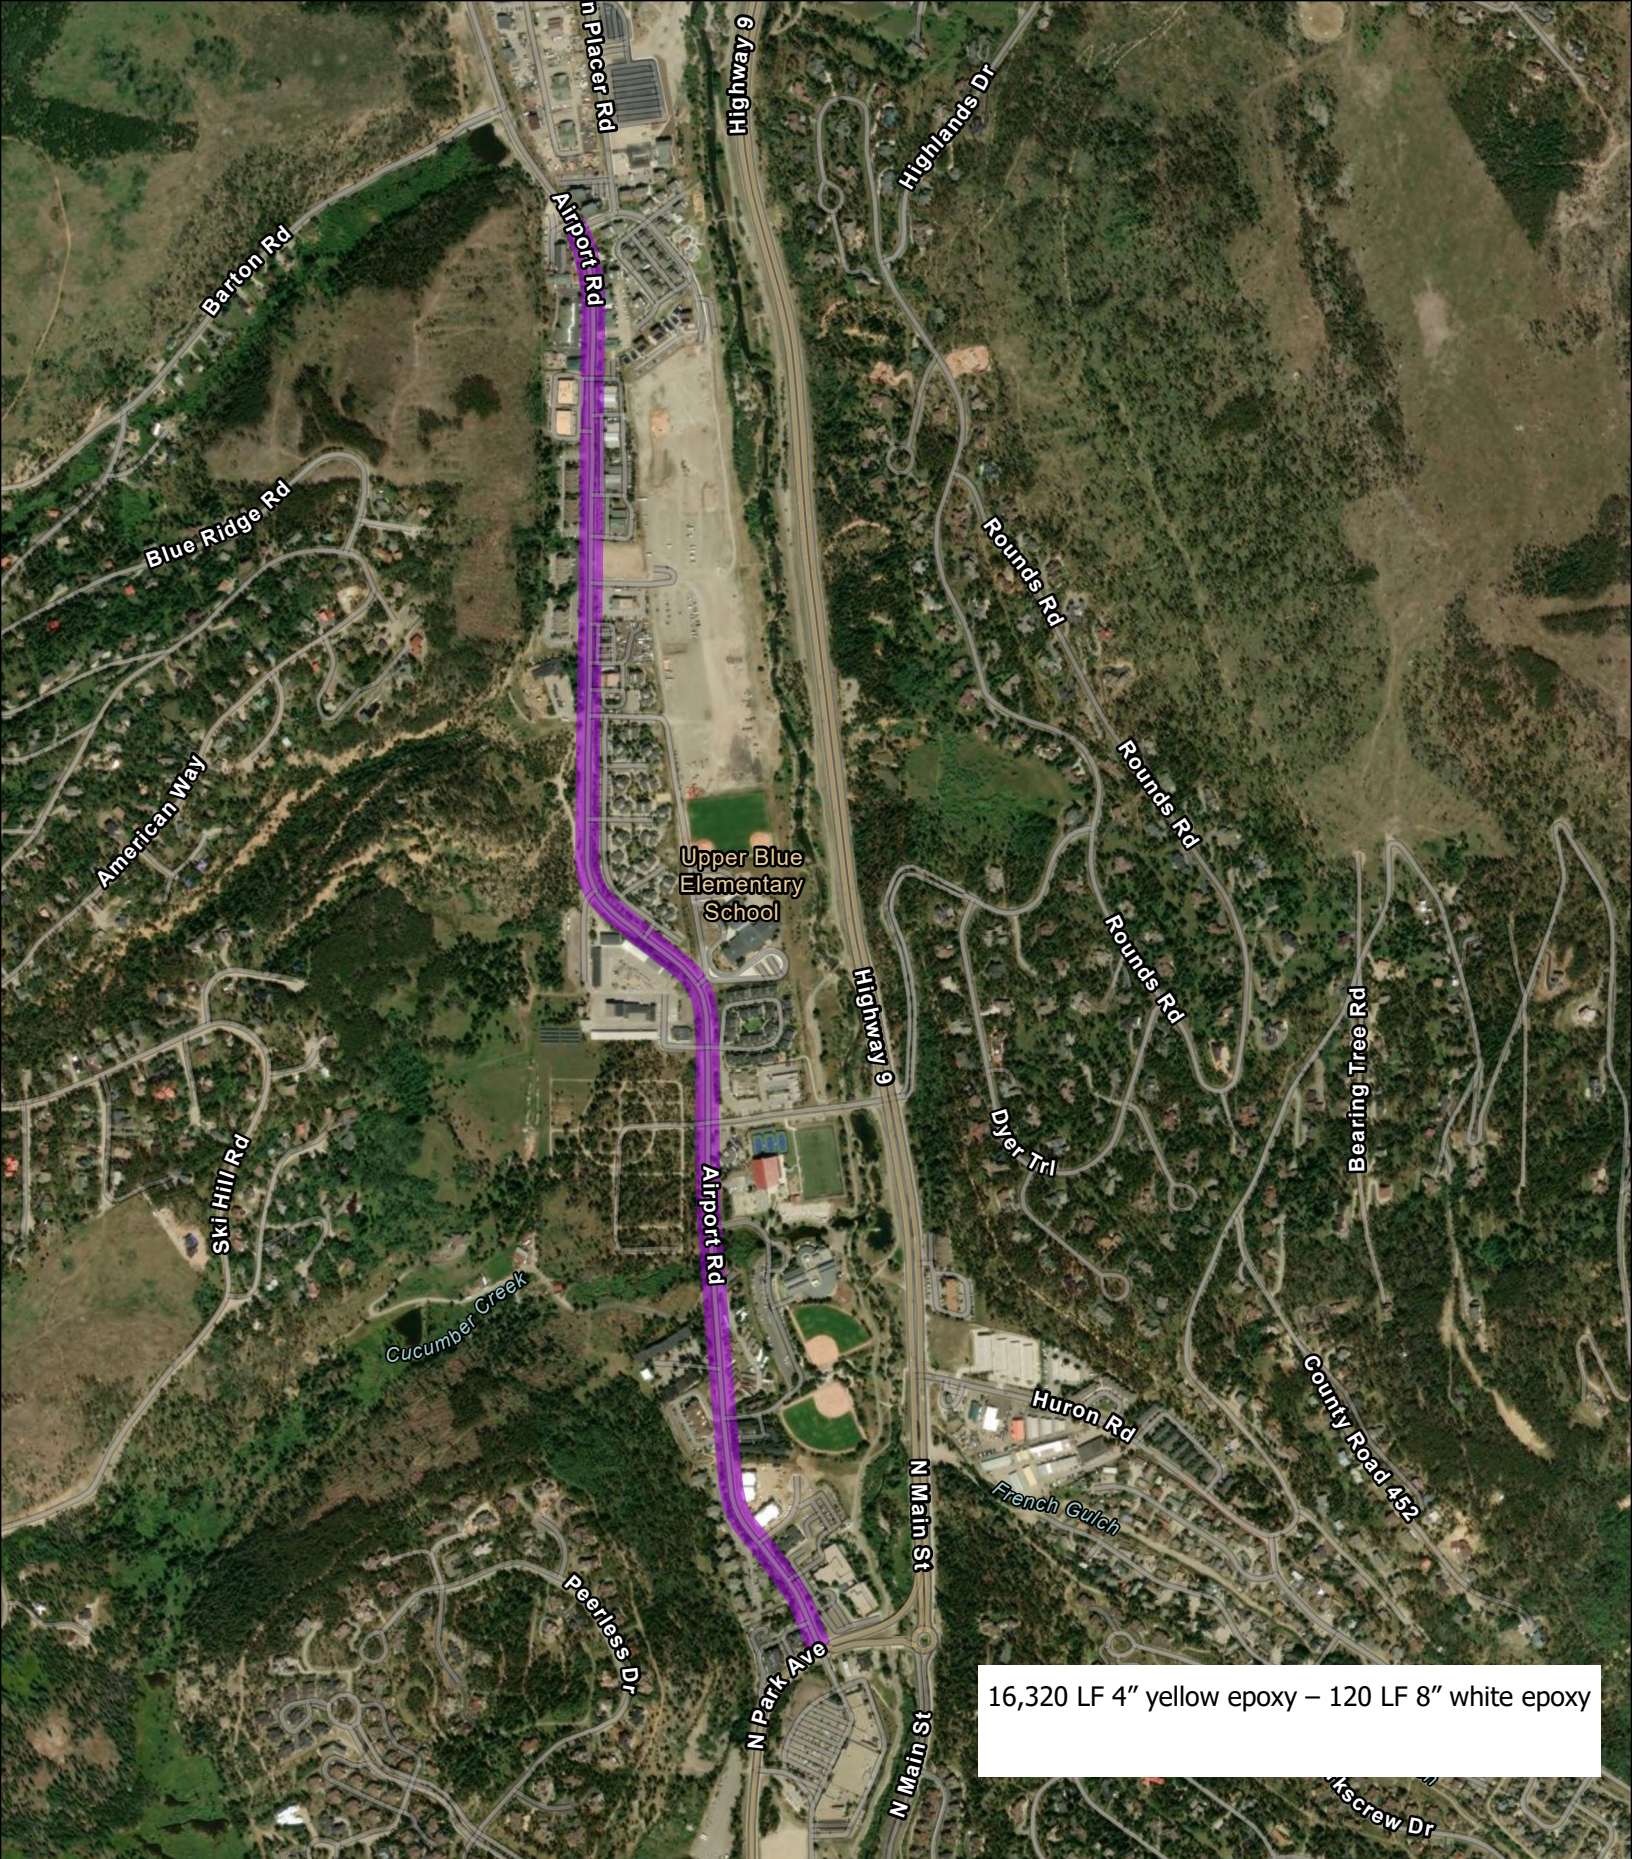


16,320 LF 4" yellow epoxy – 120 LF 8" white epoxy

Striping Areas
Town of Breckenridge



 Roads to be Striped




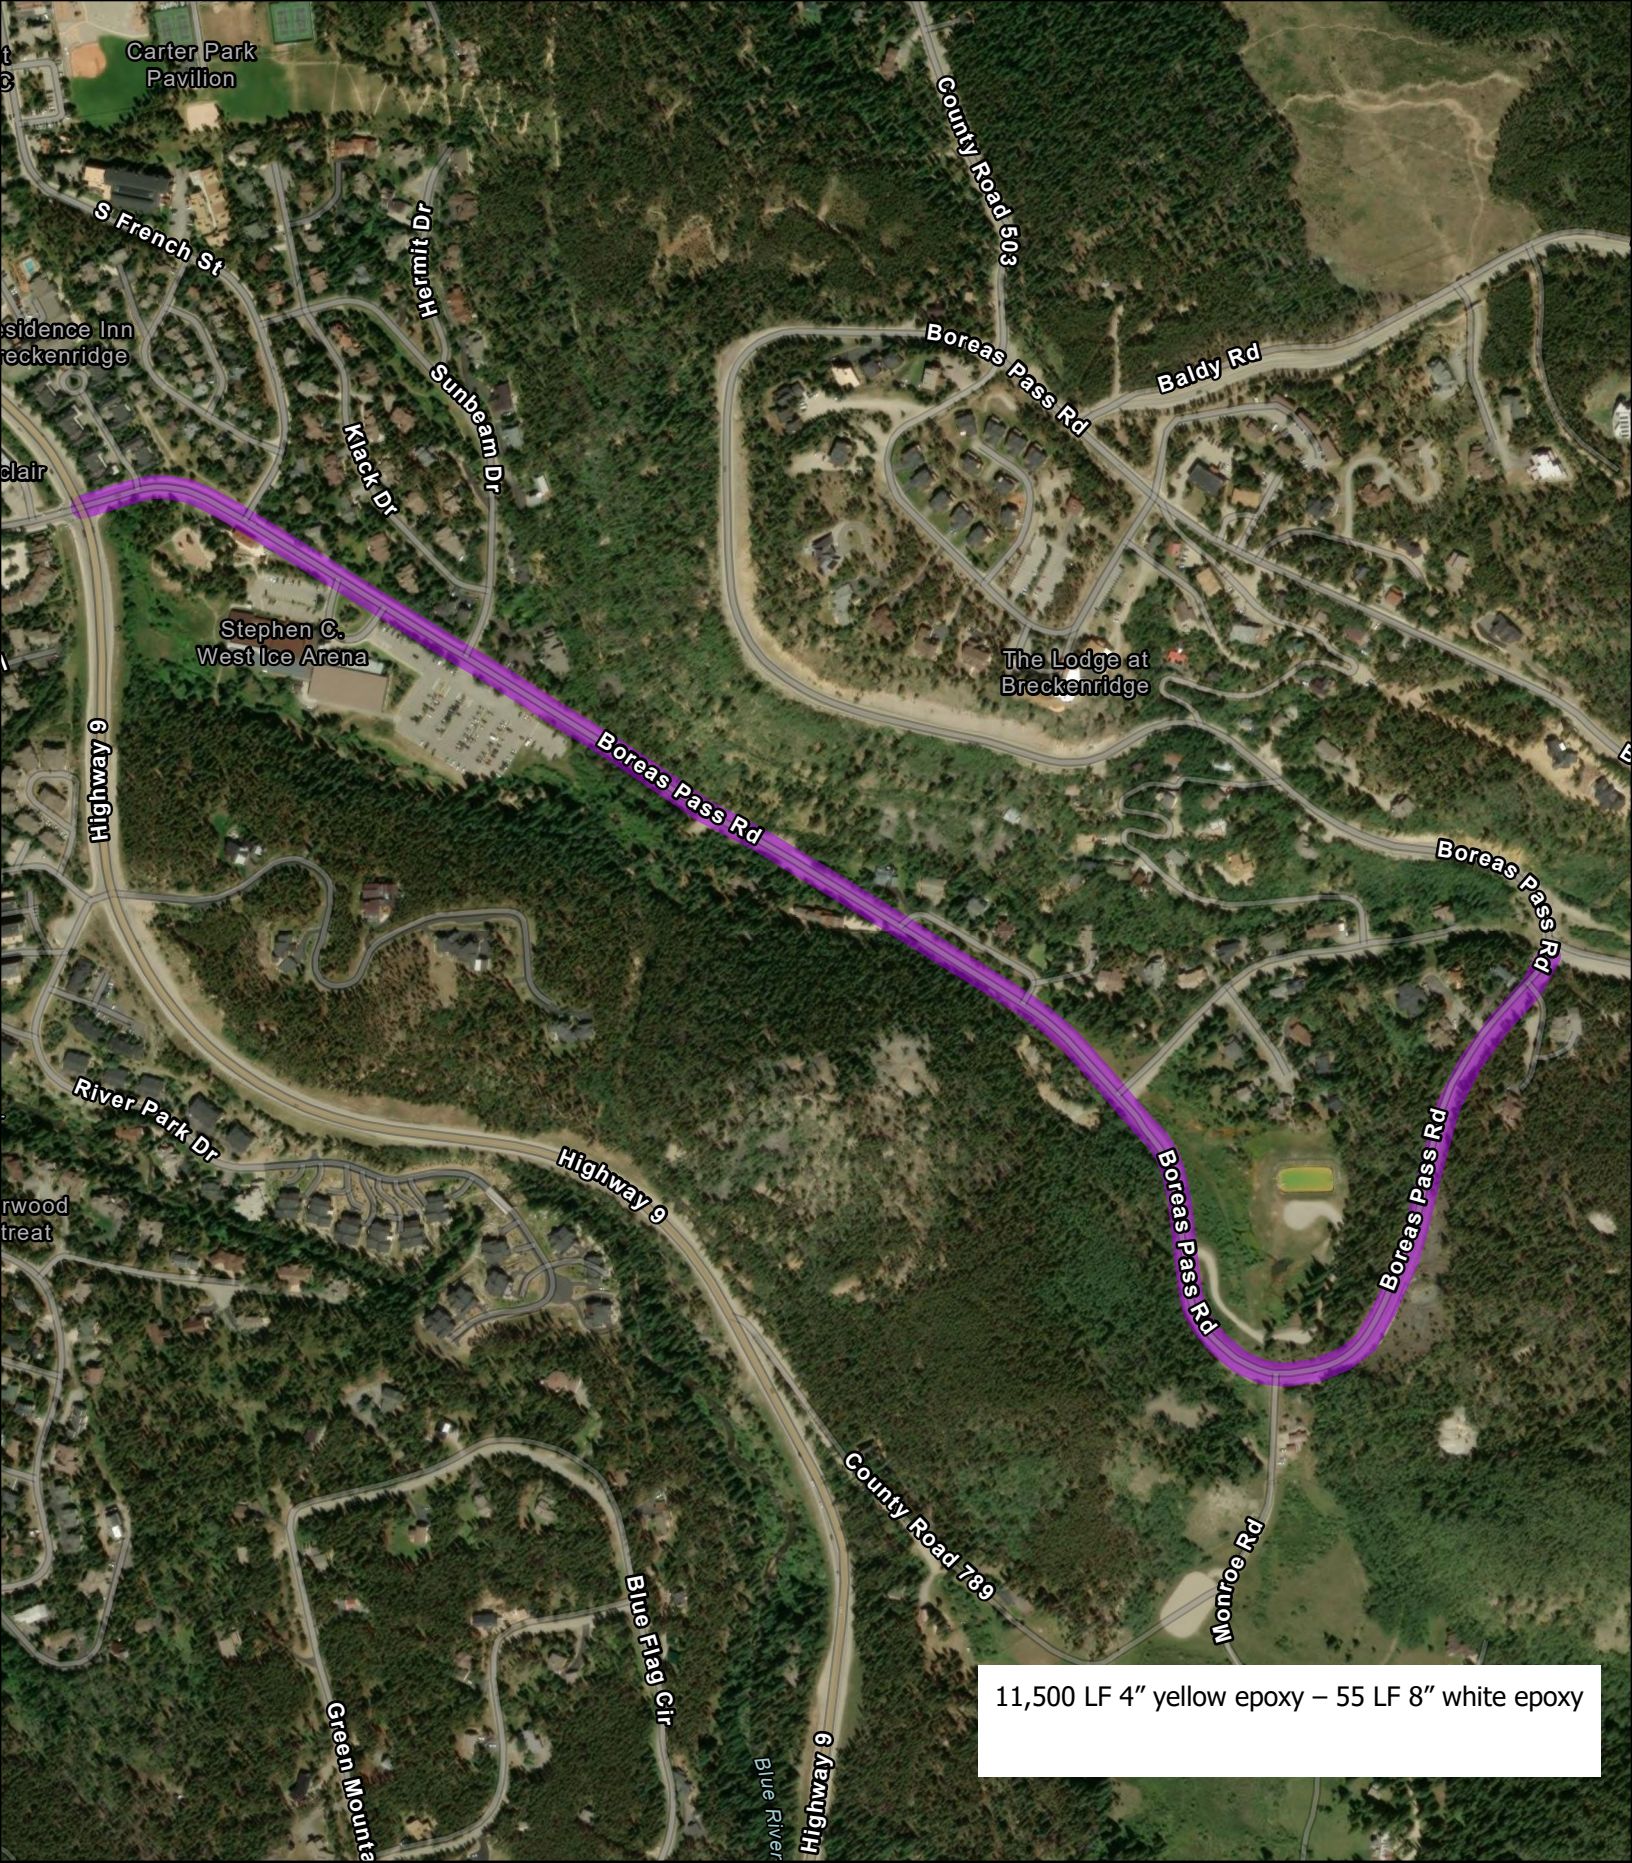


Striping Areas
Town of Breckenridge

Boreas Pass Rd

 Roads to be Striped



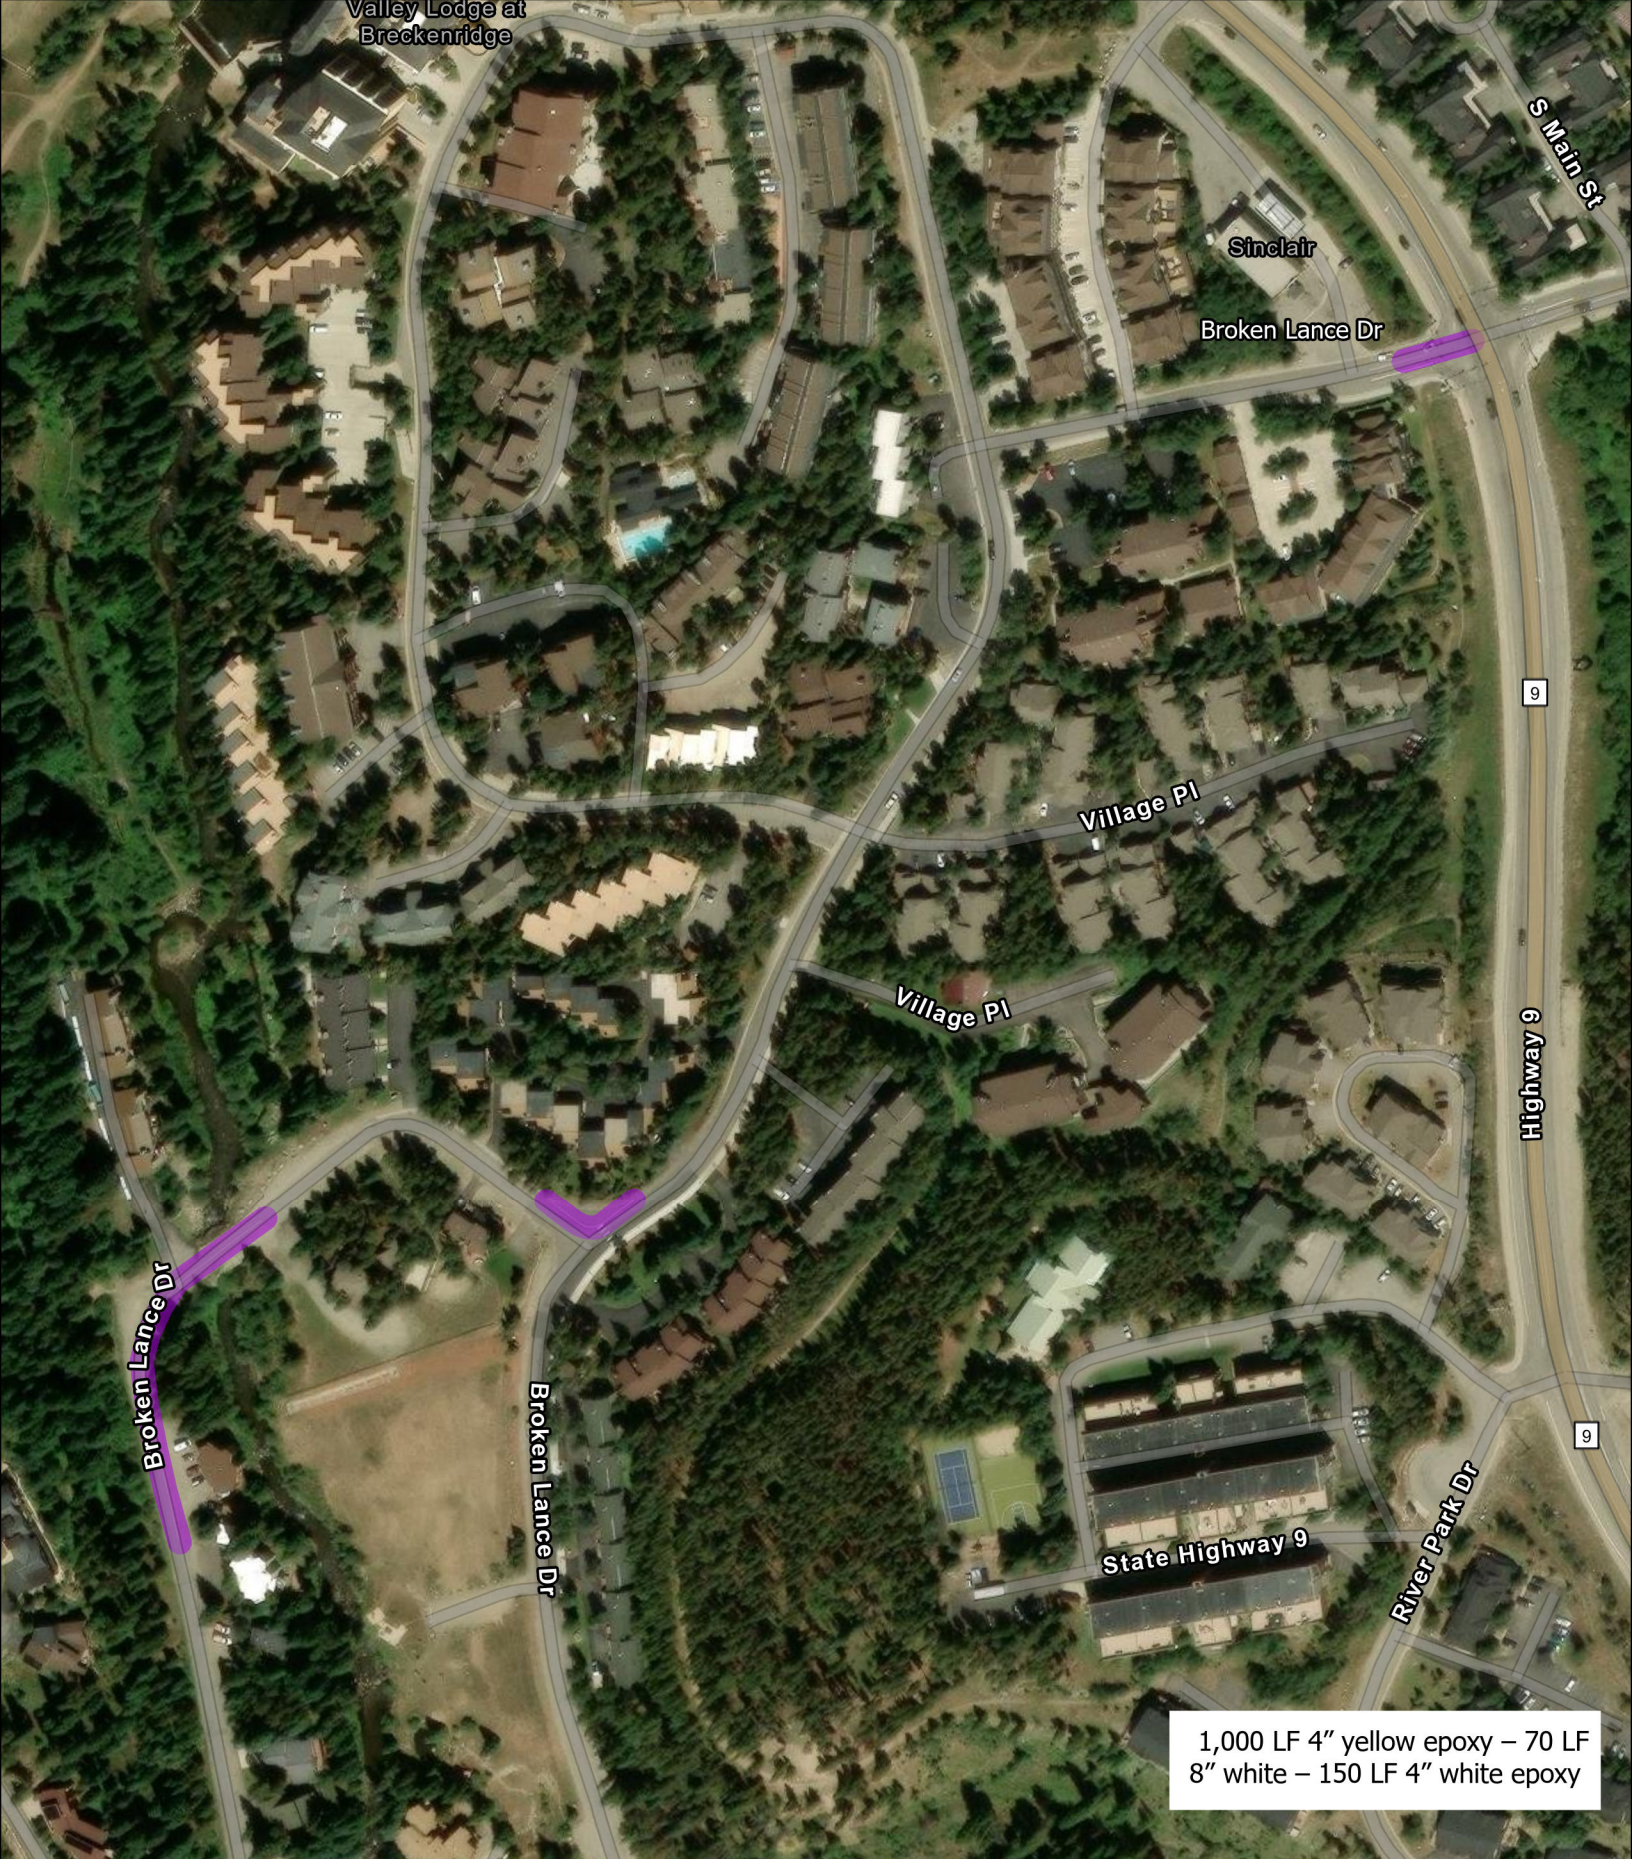

Striping Areas
Town of Breckenridge

Columbine / Broken Lance

 Roads to be Striped



0 187.5 375 750 Feet





2,780 LF 4" yellow epoxy –200 LF 8" white epoxy - 3,000 LF 4" white epoxy

Striping Areas
Town of Breckenridge

Coyne Valley

 Roads to be Striped



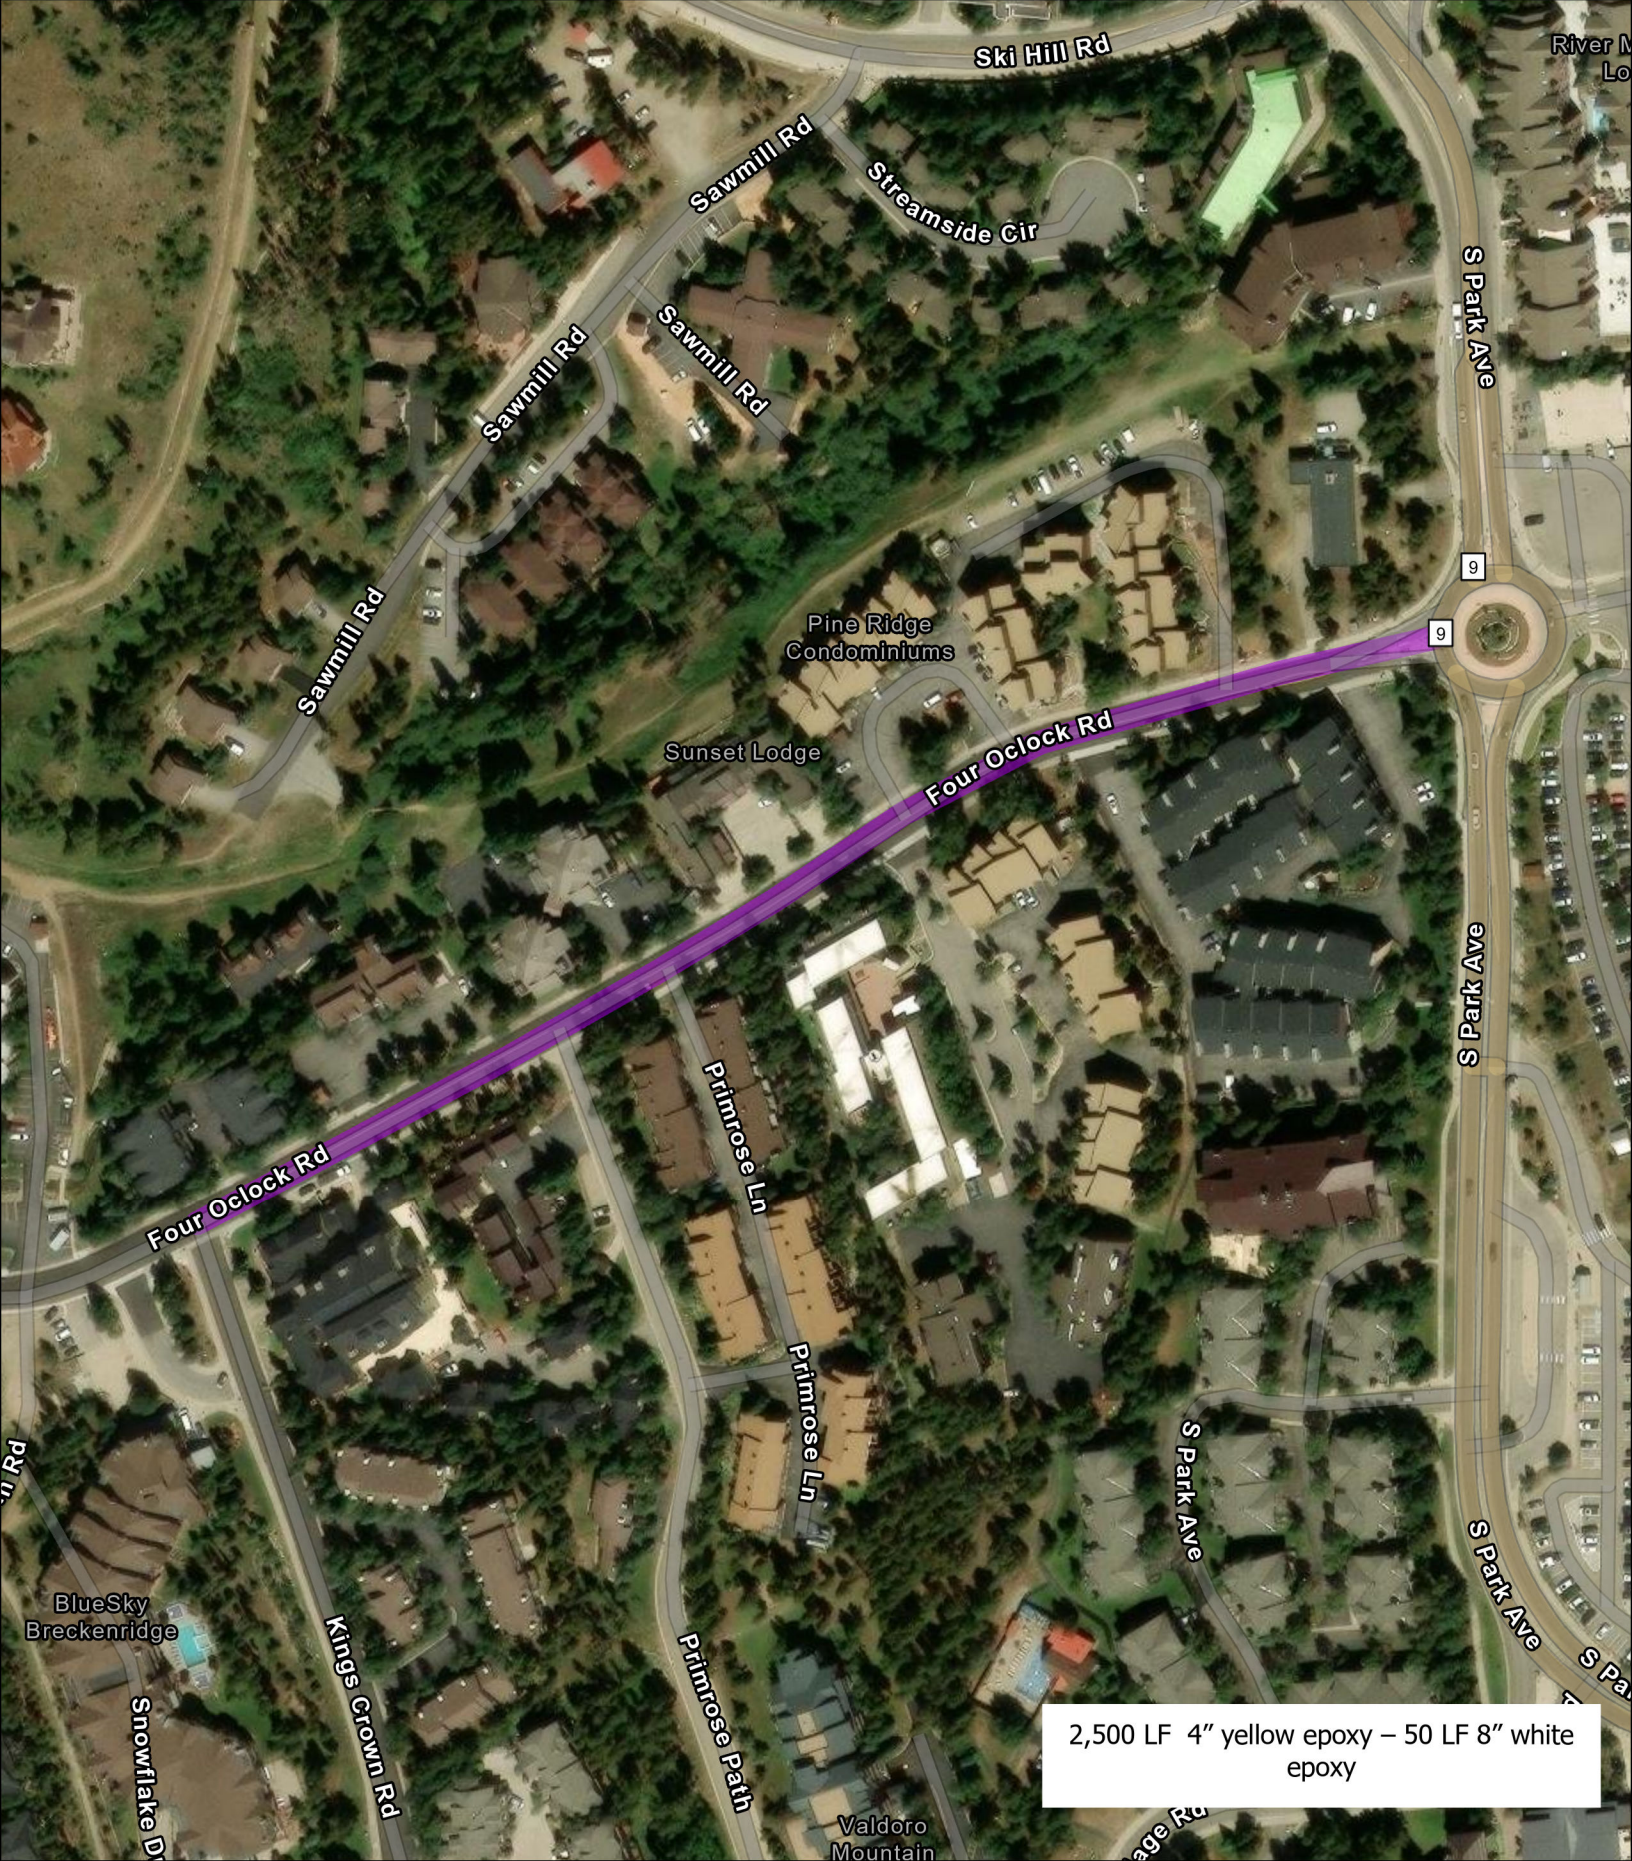

Striping Areas
Town of Breckenridge

Four O'Clock Rd

 Roads to be Striped



0 165 330 660 Feet




5,770 LF 4" yellow epoxy – 5,900 LF 4" white epoxy

Striping Areas
Town of Breckenridge

French Gulch Rd

 Roads to be Striped






Combined 1,780 LF 4" yellow epoxy – 145 LF 8" white epoxy

Striping Areas West French & East French Town of Breckenridge

 Roads to be Striped






60 LF 4" yellow epoxy - 50 LF 4" white epoxy

Striping Areas
Town of Breckenridge

Highlands Dr

 Roads to be Striped






Striping Areas
Town of Breckenridge

Highlands Dr #2

 Roads to be Striped







Striping Areas
Town of Breckenridge

Lincoln Ave

 Roads to be Striped



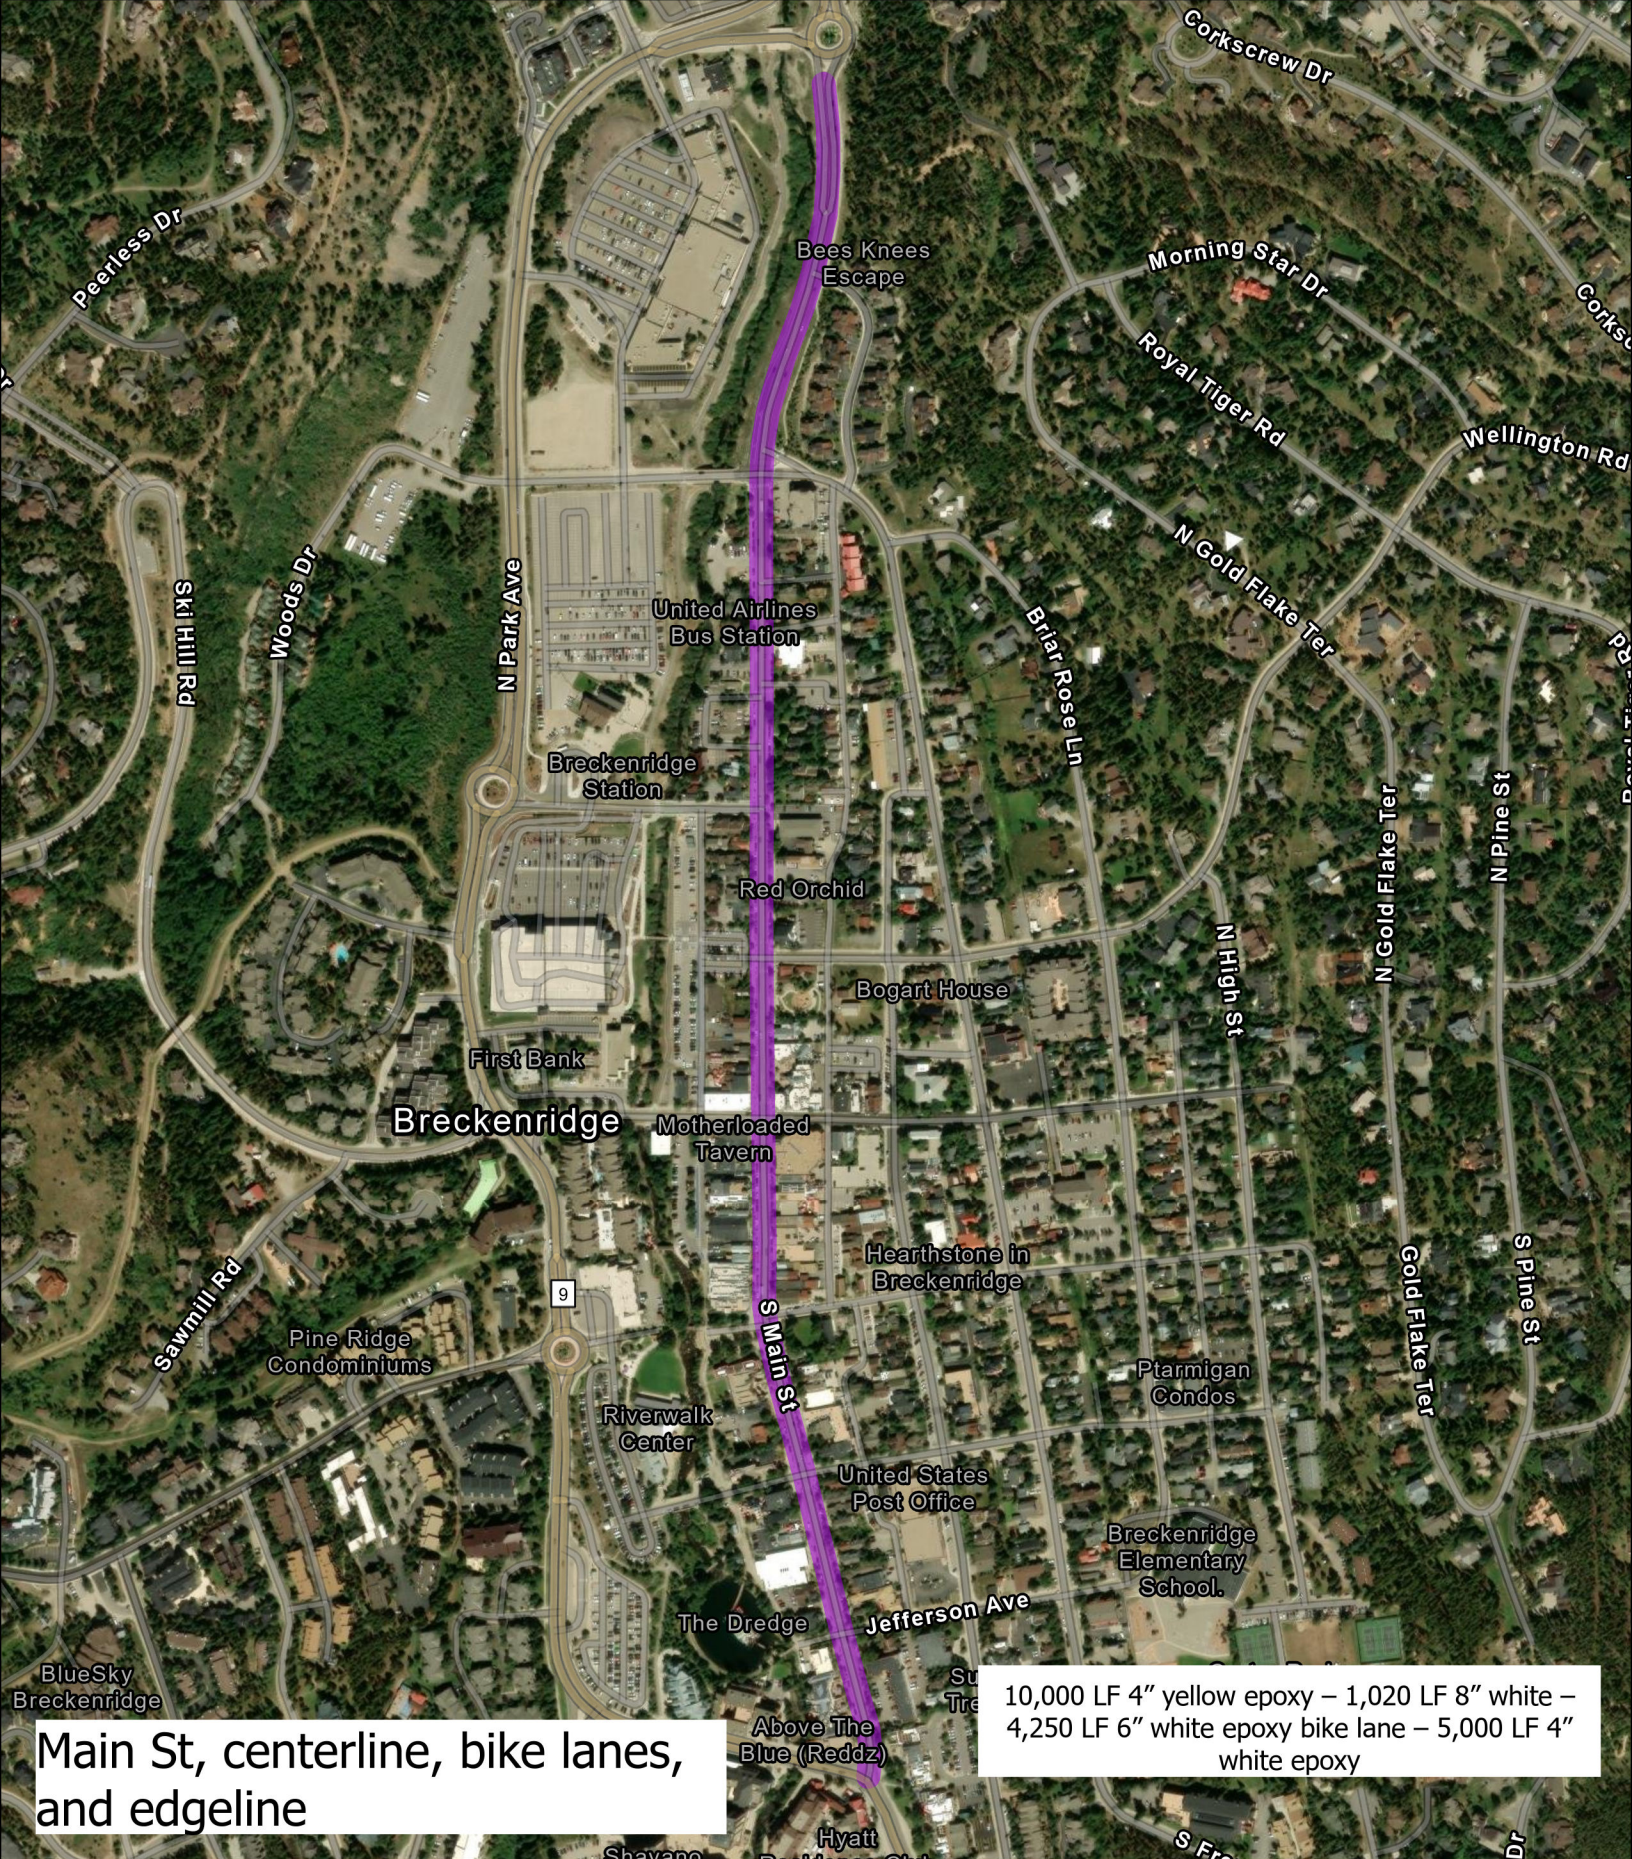


Main St, centerline, bike lanes,
and edgeline

10,000 LF 4" yellow epoxy – 1,020 LF 8" white –
4,250 LF 6" white epoxy bike lane – 5,000 LF 4"
white epoxy

Striping Areas Town of Breckenridge

 Roads to be Striped





Striping Areas
Town of Breckenridge

Reiling Rd

 Roads to be Striped





Striping Areas
Town of Breckenridge

Royal Tiger/ High

 Roads to be Striped



0 135 270 540 Feet




125 LF 4" yellow epoxy- 60 LF 8" white epoxy

Striping Areas

Town of Breckenridge

S Ridge St at SH9

 Roads to be Striped







Striping Areas
Town of Breckenridge

Shores Lane

 Roads to be Striped




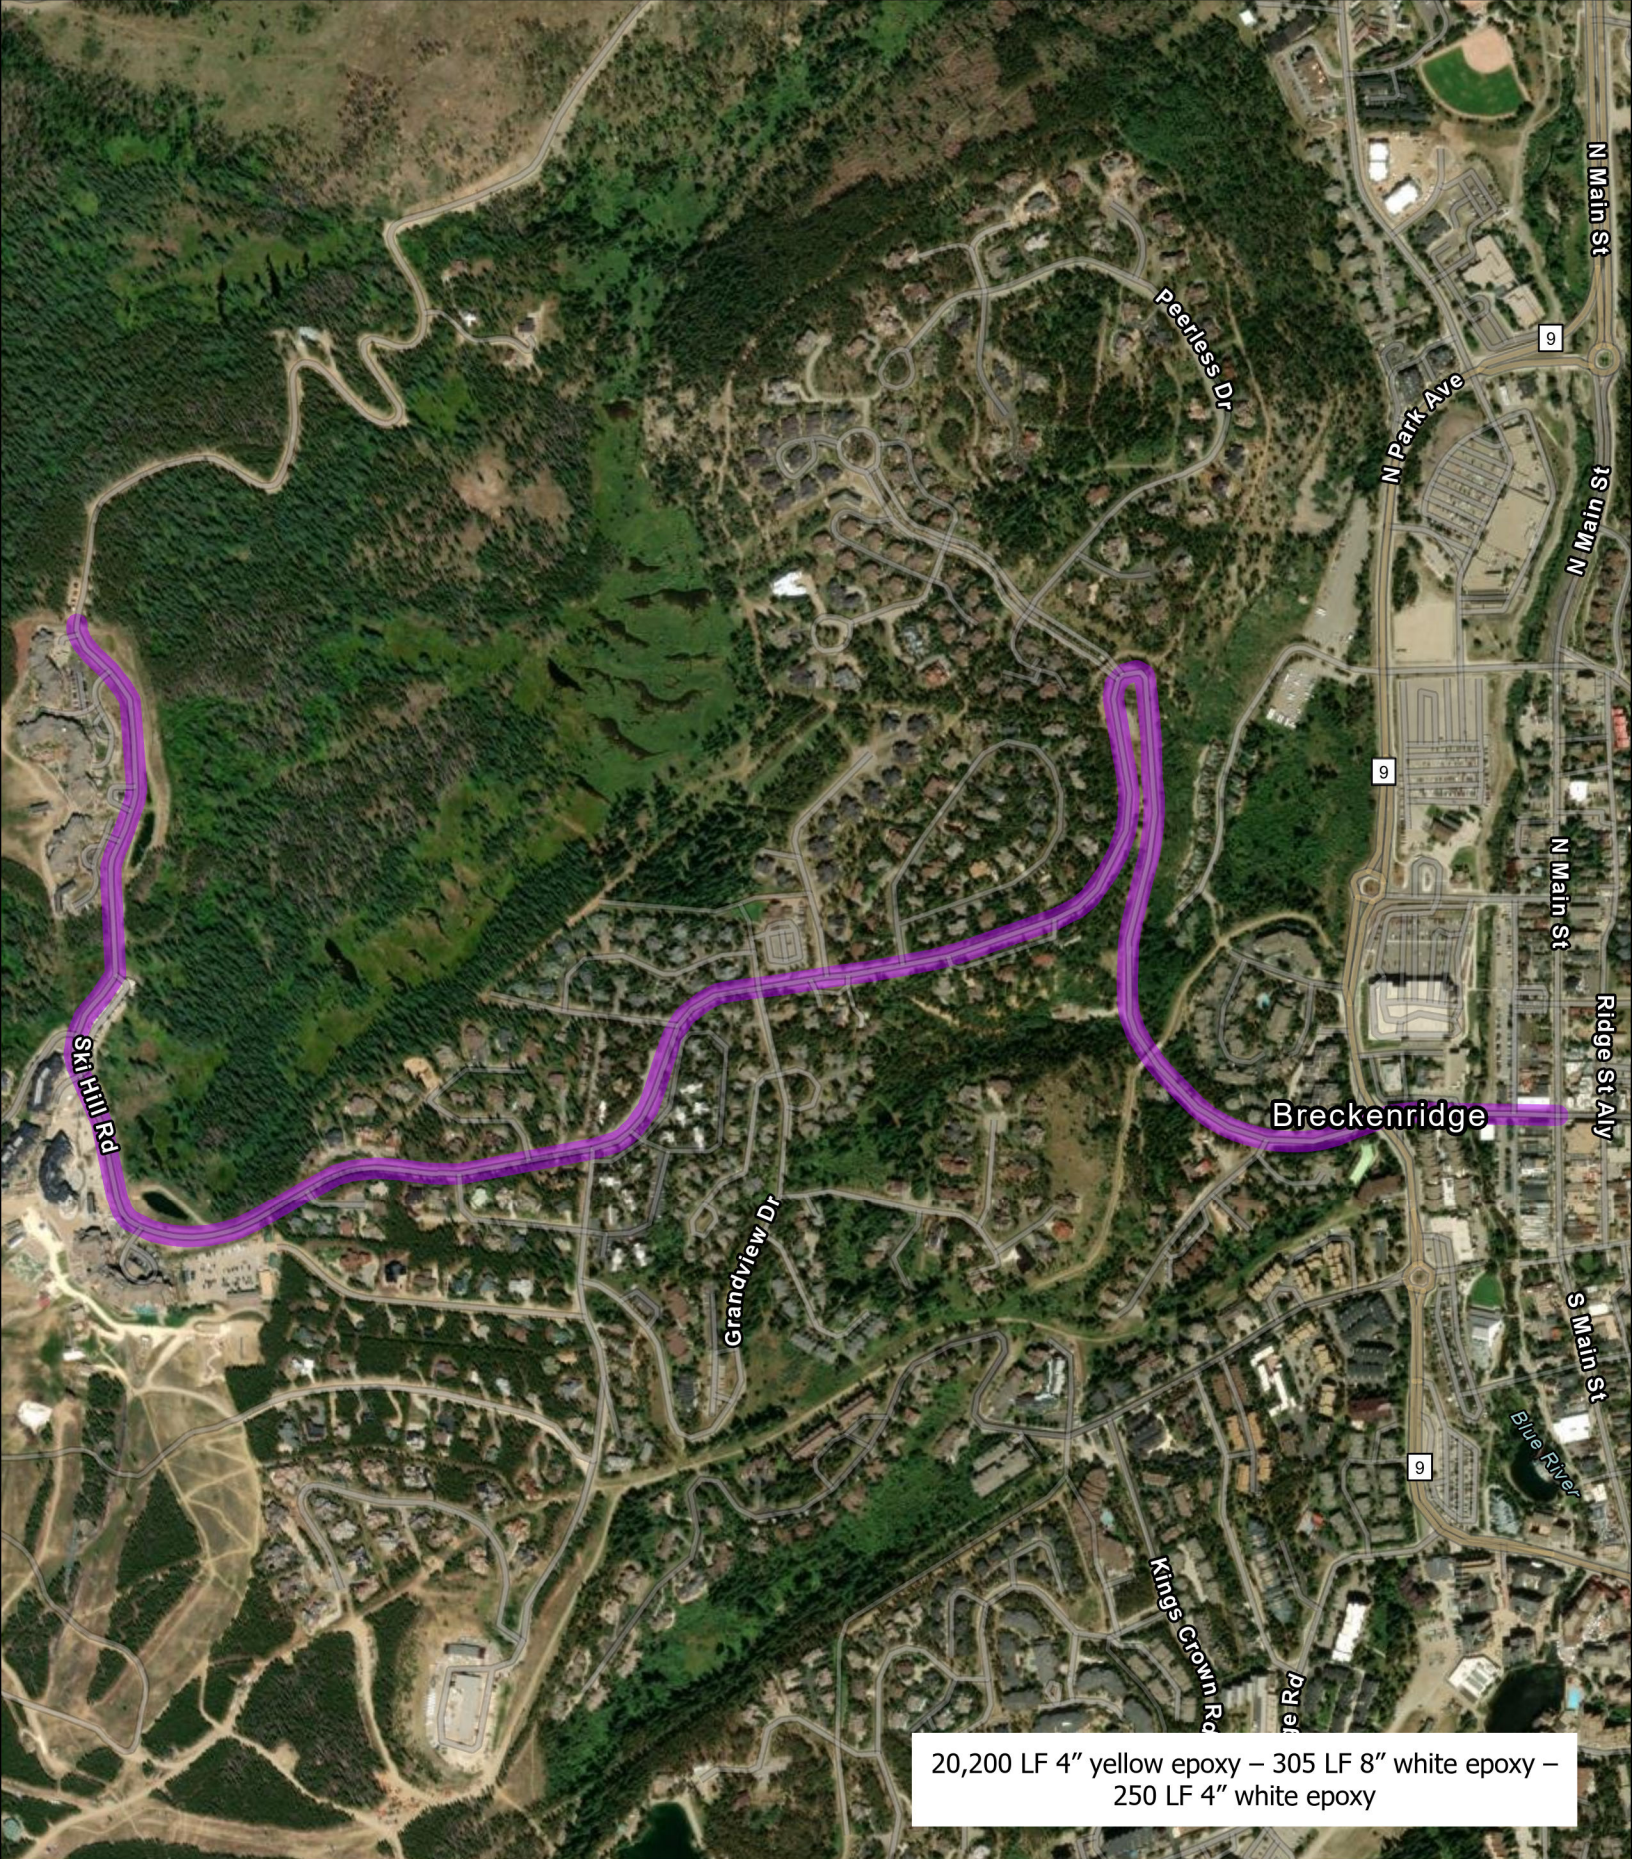

Striping Areas
Town of Breckenridge

Ski Hill Rd

 Roads to be Striped







Striping Areas
Town of Breckenridge

Stables Rd

 Roads to be Striped



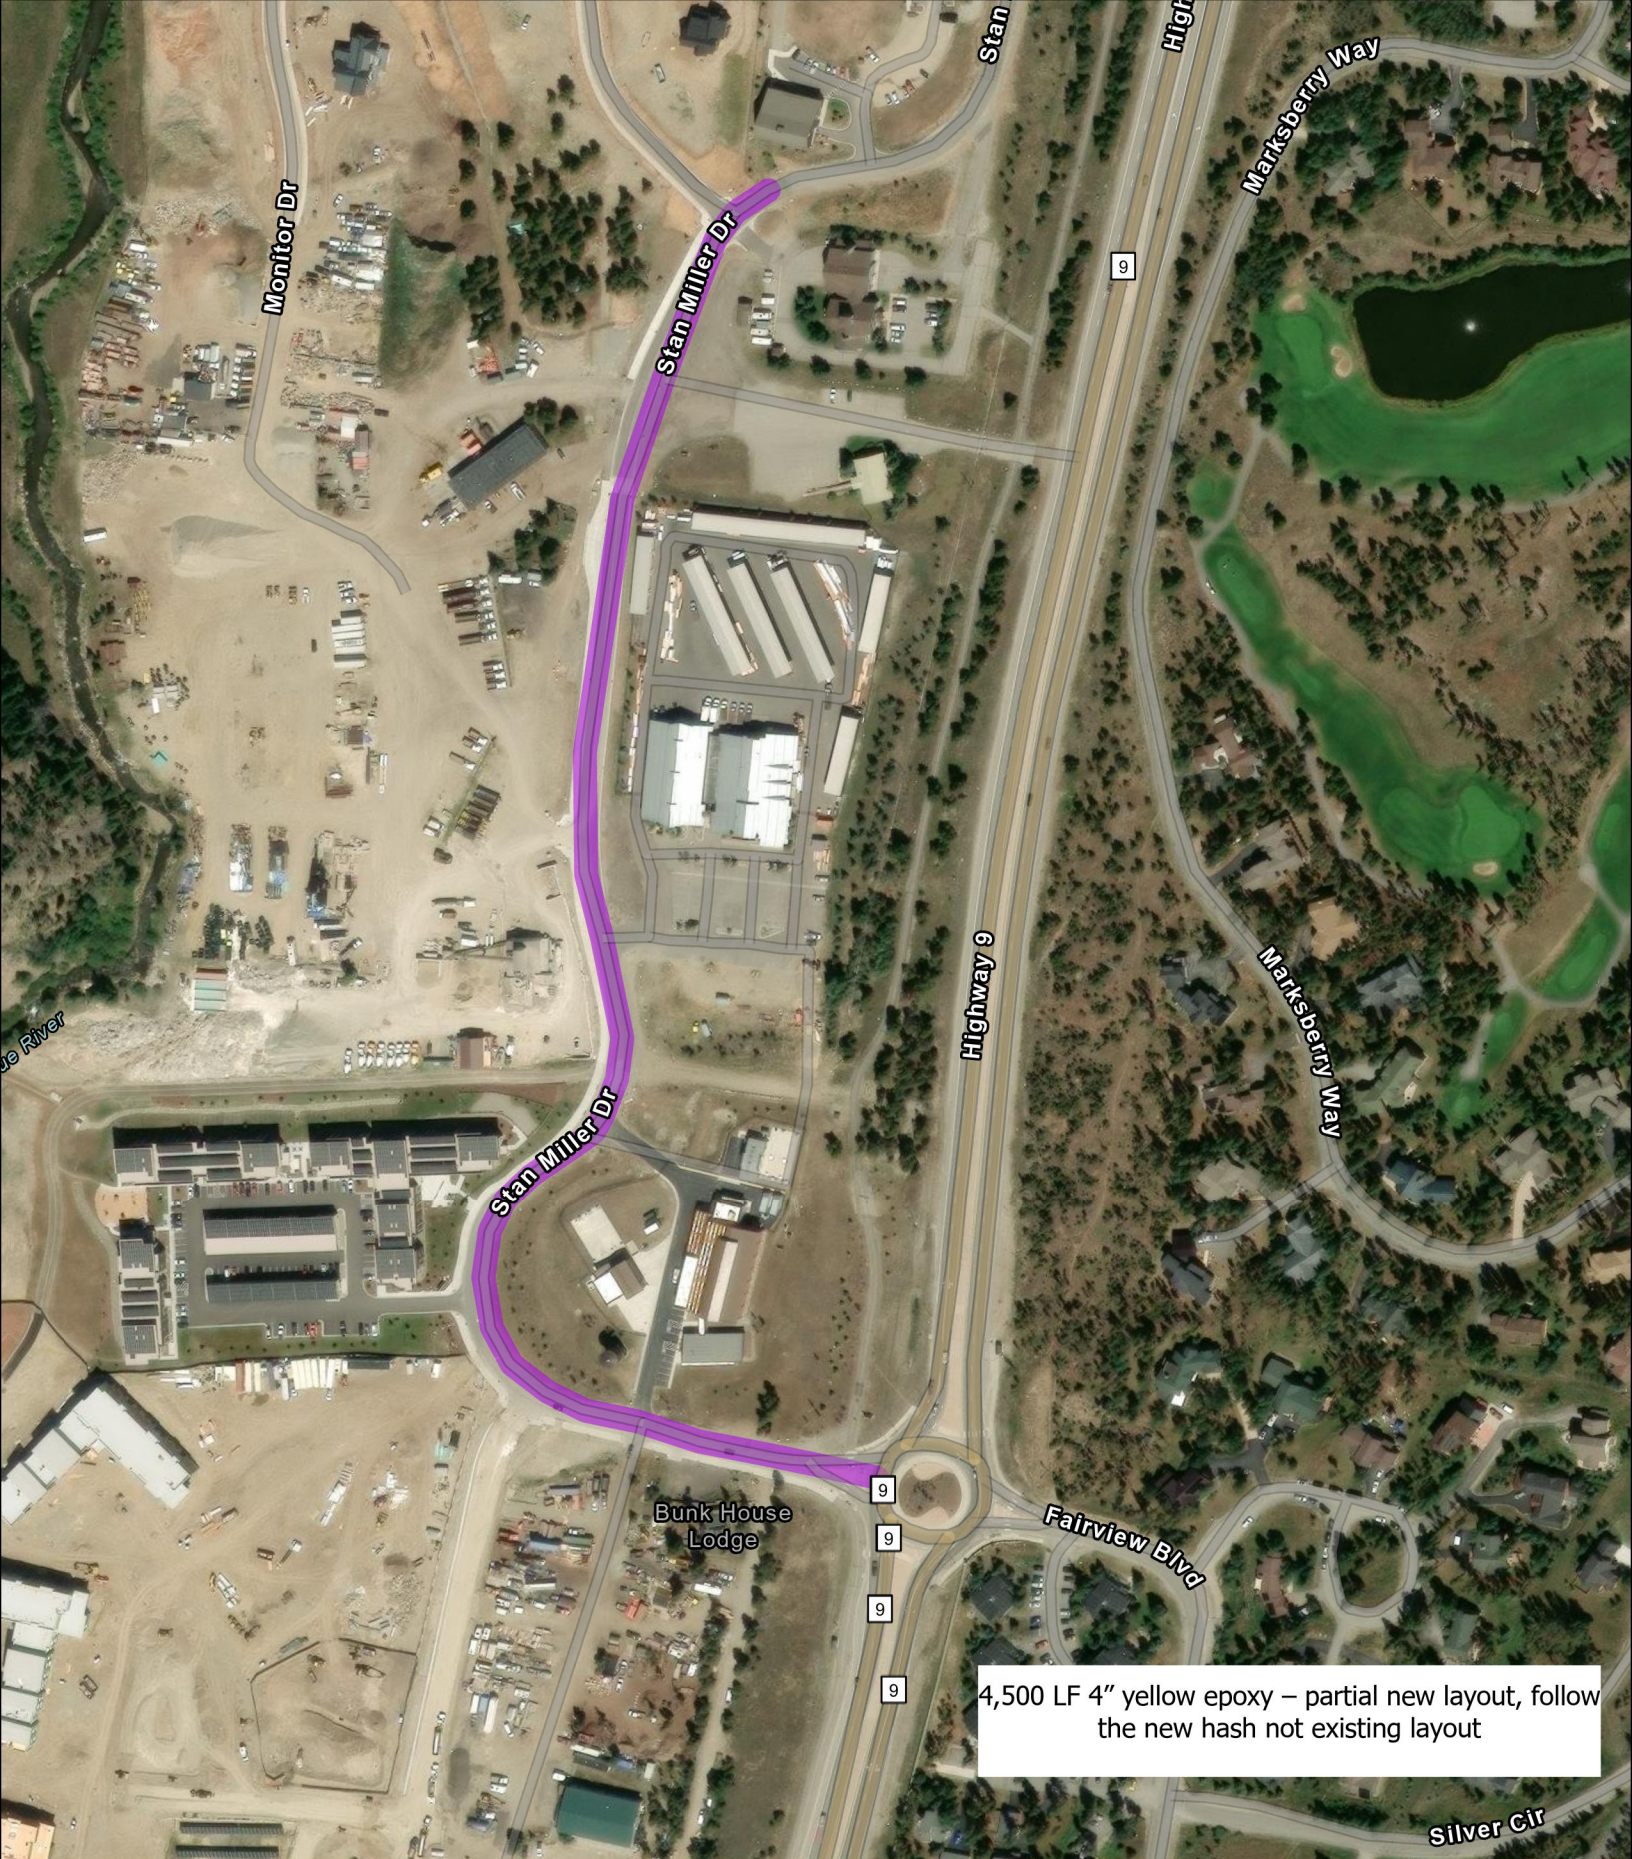

Striping Areas
Town of Breckenridge

Stan Miller Dr

 Roads to be Striped





Striping Areas
Town of Breckenridge

Tiger Rd / Shores

 Roads to be Striped



0 500 1,000 2,000 Feet





Striping Areas


Town of Breckenridge

Valley Brook

 Roads to be Striped




0 245 490 980 Feet

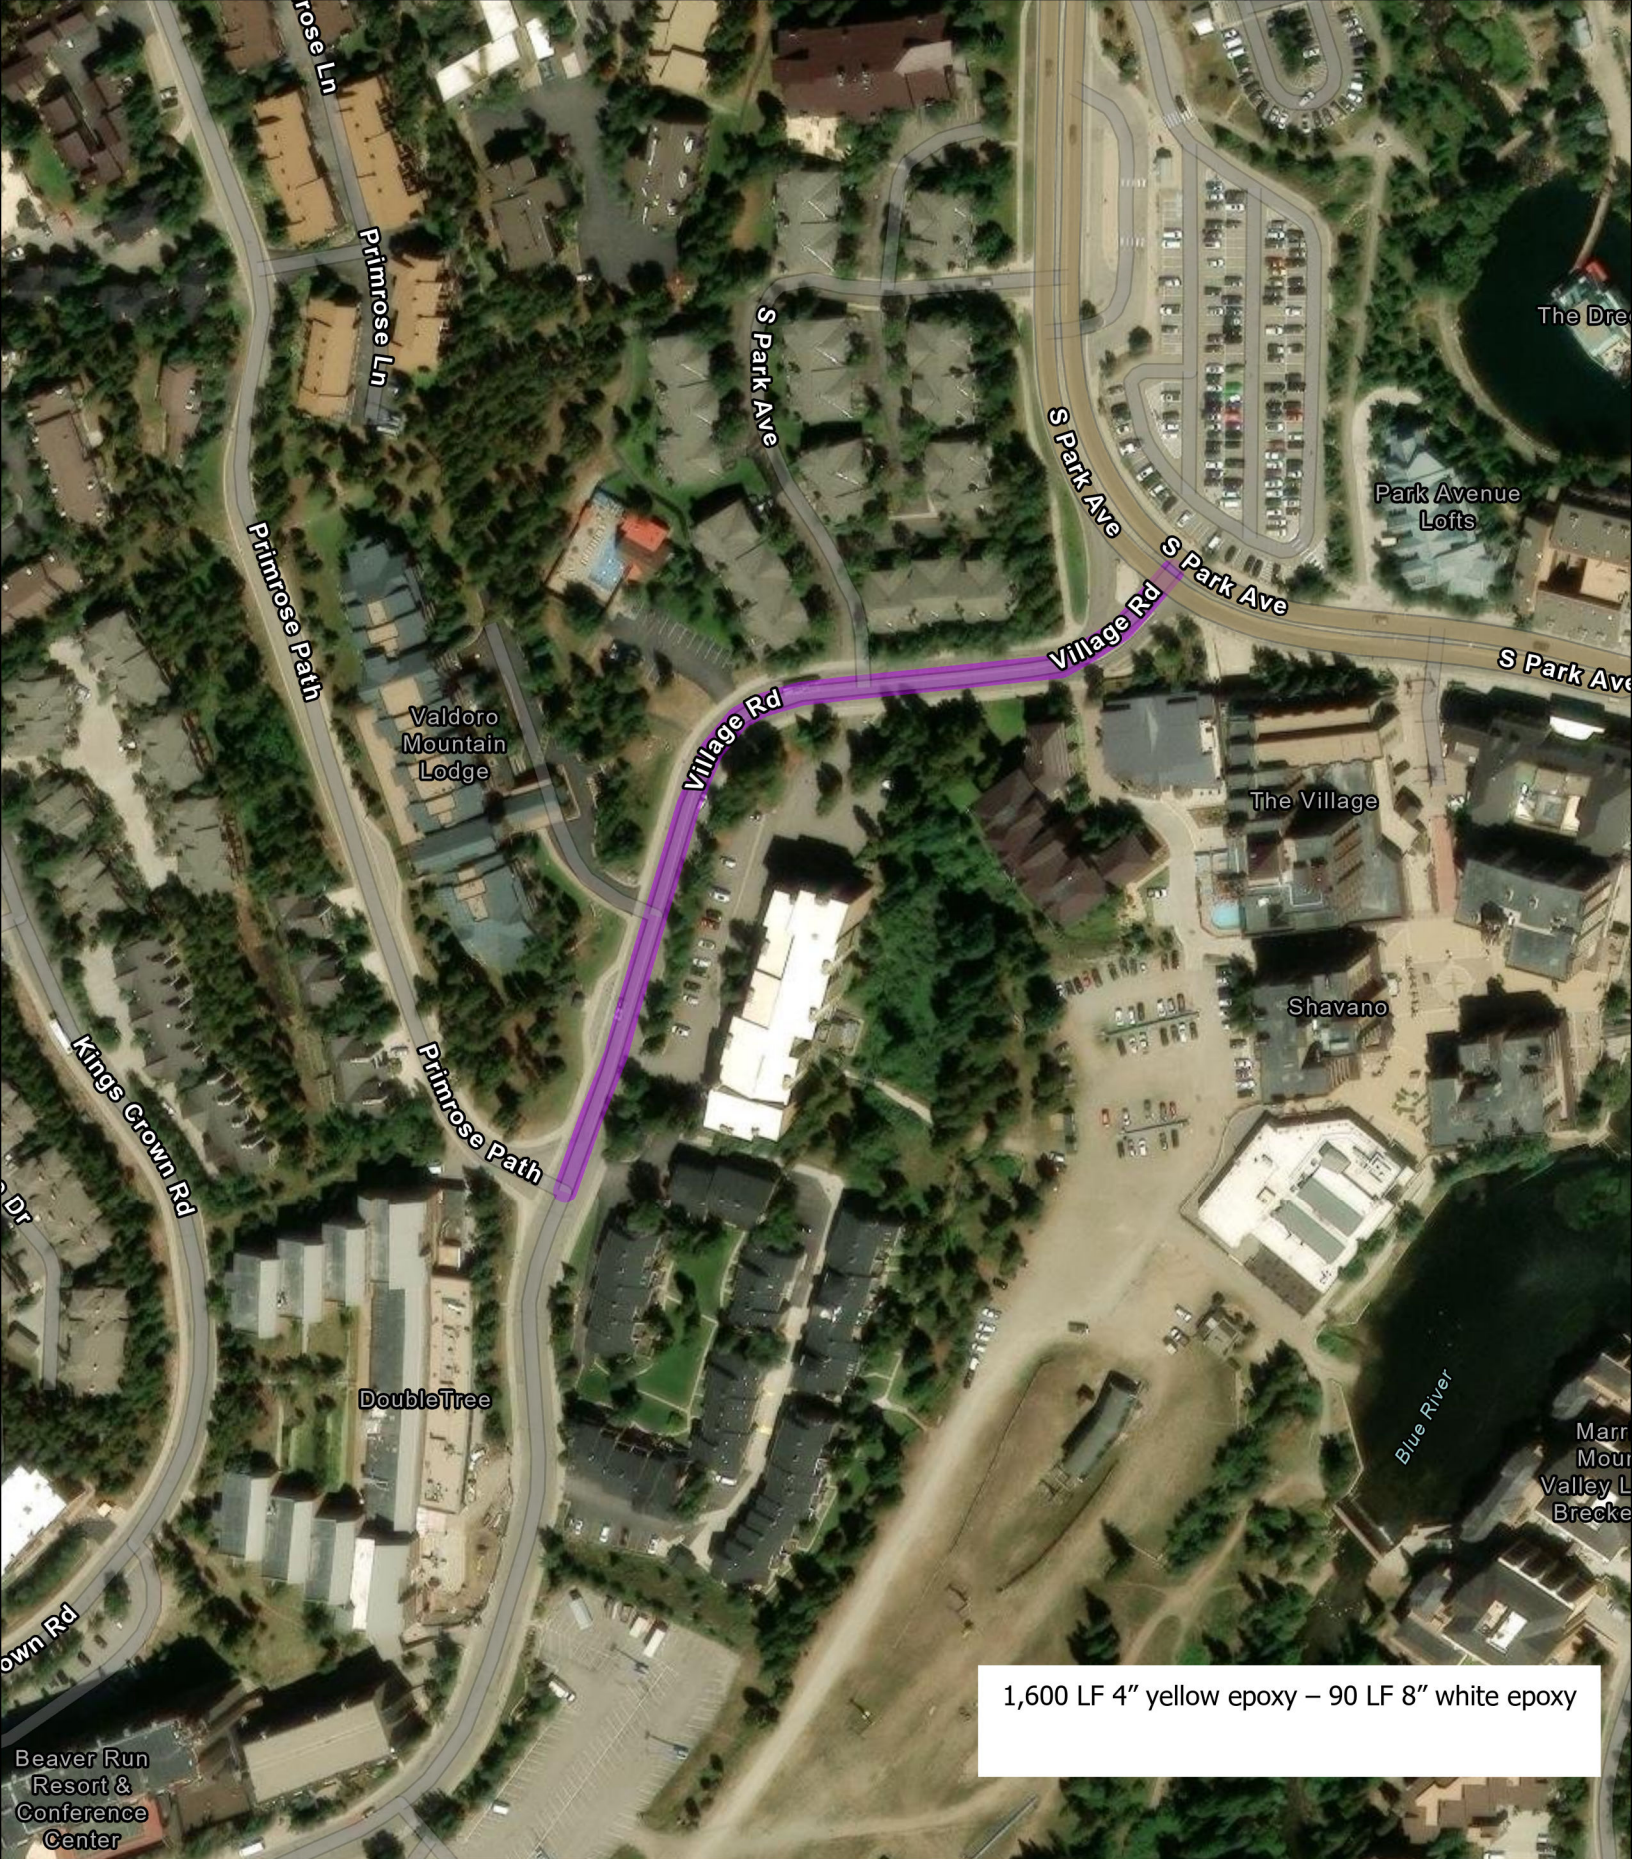

Striping Areas
Town of Breckenridge

Village Rd

 Roads to be Striped







900 LF of 4" yellow epoxy and 200 LF of 8" white epoxy

Striping Areas
Town of Breckenridge

Watson Ave

 Roads to be Striped



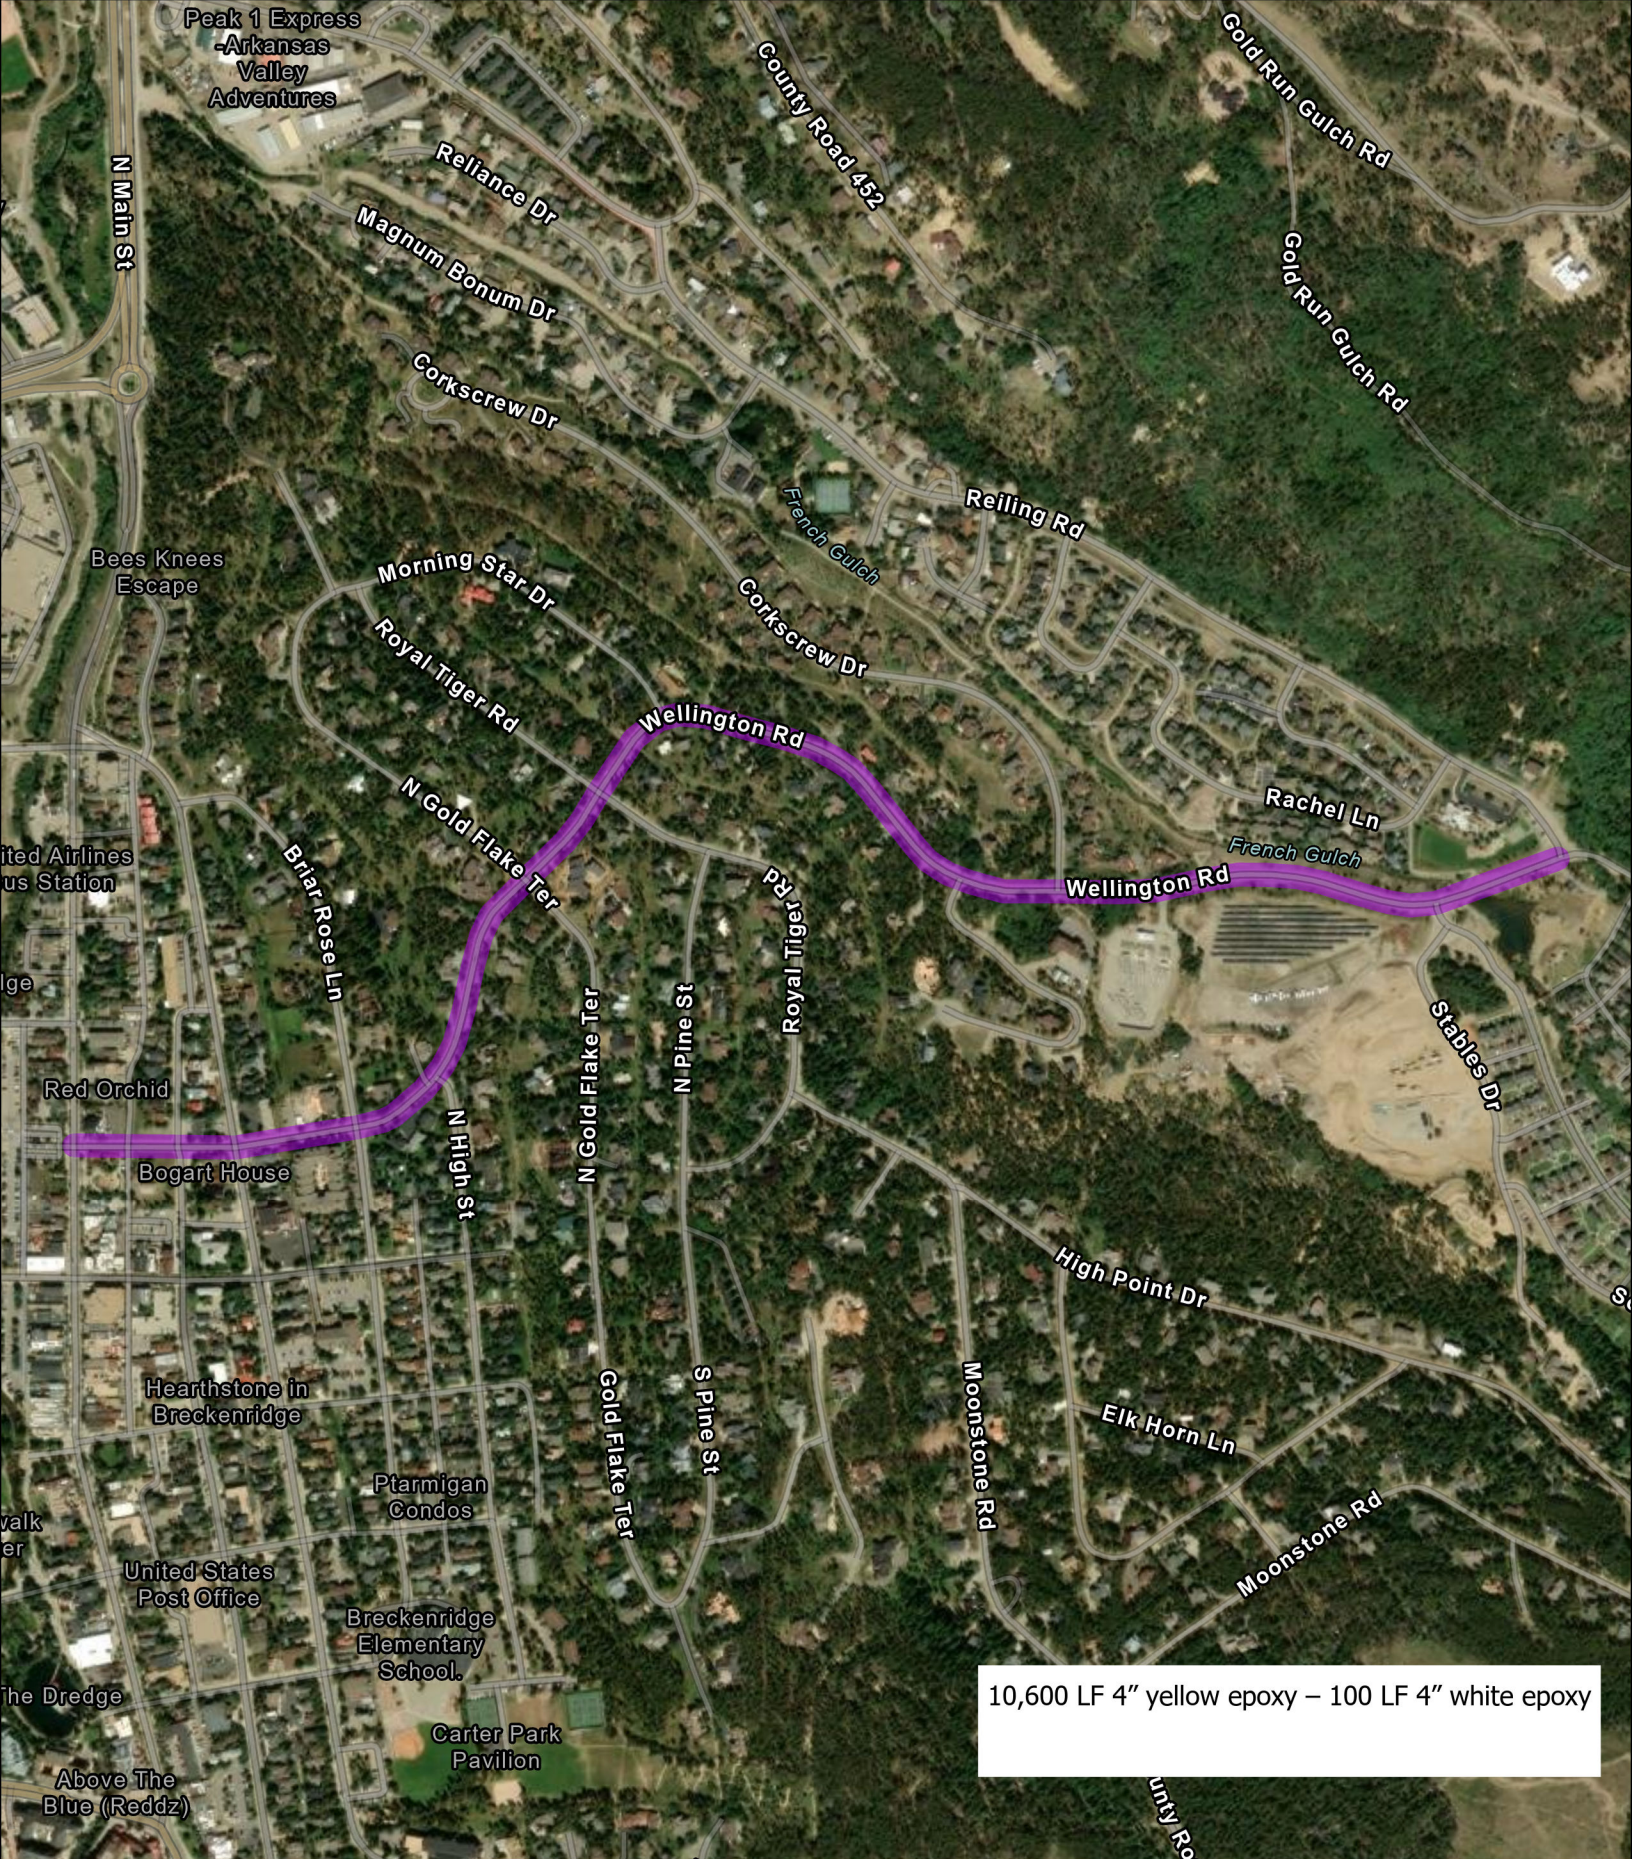

Striping Areas
Town of Breckenridge

Wellington Rd

 Roads to be Striped

