

Terrain II 30 Mil


|                      |                                                                                                                      |                          |
|----------------------|----------------------------------------------------------------------------------------------------------------------|--------------------------|
| Collection           | Terrain II                                                                                                           |                          |
| Style Number         | 0892V                                                                                                                |                          |
| Construction         | Heavy Commercial Luxury Vinyl Tile                                                                                   |                          |
| Class / ASTM F1700   | Class III, Type B                                                                                                    |                          |
| Finish               | ExoGuard+®                                                                                                           |                          |
|                      | U.S.                                                                                                                 | Metric                   |
| Nominal Dimensions   | 6 in w x 48 in l                                                                                                     | 15 cm w x 122 cm l       |
| Actual Dimensions    | 5.96 in w x 48.00 in l                                                                                               | 15.14 cm w x 121.92 cm l |
| Wear Layer Thickness | 30 mil (0.03 in)                                                                                                     | 0.76 mm                  |
| Overall Thickness    | 0.118 in                                                                                                             | 3 mm                     |
| Edge Profile         | Squared Edge                                                                                                         |                          |
| Installation Type    | Dry Back                                                                                                             |                          |
| Installation         | Direct Glue                                                                                                          |                          |
| Recommended Adhesive | 2200 1 Gallon, 2200 4 Gallon, 4151, 4200 1 Gallon, 4200 4 Gallon, 4252 (No Heavy Rolling or Static Loads) or S150-95 |                          |

Packaging

|                   |             |           |
|-------------------|-------------|-----------|
| Pieces per Carton | 18 pcs      |           |
| Area per Carton   | 35.76 ft²   | 3.32 m²   |
| Weight per Carton | 38 lbs      | 17.24 kg  |
| Area per Pallet   | 1716.48 ft² | 159.47 m² |
| Boxes per Pallet  | 48 boxes    |           |



Recommended Installation Method

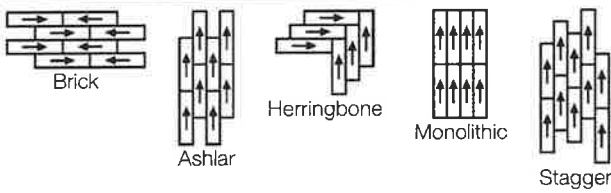

Coordinating Products

LVT: Terrain II 12 Mil, Terrain II 20 Mil, Terrain II 20 Mil 5 Mm, Terrain II 12 Mil 2.0

Performance + Testing

|                                                                                                                                  |                                                                                                           |                                                                                                                                                                                                        |
|----------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Static Load (ASTM F970)                                                                                                          | Passes (Modified), *1500 lbs                                                                              | *This test is intended to compare relative properties of different styles and constructions. Results are based on a laboratory test and used for comparative purposes - real life load limit may vary. |
| Residual Indentation (ASTM F1914)                                                                                                | Passes                                                                                                    |                                                                                                                                                                                                        |
| Resistance to Heat (ASTM F1514)                                                                                                  | Passes                                                                                                    |                                                                                                                                                                                                        |
| Resistance to Light (ASTM F1515)                                                                                                 | Passes                                                                                                    |                                                                                                                                                                                                        |
| Resistance to Chemicals (ASTM F925)                                                                                              | Passes                                                                                                    |                                                                                                                                                                                                        |
| Smoke Density (ASTM E662, Flaming Mode)                                                                                          | Passes                                                                                                    |                                                                                                                                                                                                        |
| Radiant Panel (ASTM E648)                                                                                                        | Passes, Class I                                                                                           |                                                                                                                                                                                                        |
| Coefficient of Friction (ASTM D2047, Slip Resistance)                                                                            | >0.6, meets the recommended static coefficient of friction for ADA walking surfaces and accessible routes |                                                                                                                                                                                                        |
| Static Electrical Propensity (EN 1815)                                                                                           | ≤1.8 Kv classified as 'antistatic'                                                                        |                                                                                                                                                                                                        |
| Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number. |                                                                                                           |                                                                                                                                                                                                        |

Warranties

- 15 Year Commercial Limited Warranty
- Commercial Limited Underbed Bond Warranty

Diversity & Inclusion

We promote supplier participation that is reflective of Shaw Industries' diverse customer base and local community. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

Material Health & Environmental Certifications

|                                         |                                                                                                                                                                                                                                                                                      |
|-----------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Health & Wellbeing                      |                                                                                                                                                                                                                                                                                      |
| Material & Ingredient Transparency      | Health Product Declaration (HPD)   1000 ppm Disclosure                                                                                                                                                                                                                               |
| Indoor Air Quality                      | FloorScore®   Certified                                                                                                                                                                                                                                                              |
| Climate Impact                          |                                                                                                                                                                                                                                                                                      |
| Environmental Product Declaration (EPD) | 3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017                                                                                                                                                                                                         |
| Embodied Carbon (Cradle to Gate)        | 9.59 Kg CO <sub>2</sub> /M <sup>2</sup>                                                                                                                                                                                                                                              |
| Total Recycled Content                  | 30% (Pre-Consumer 30%   Post-Consumer 0%)                                                                                                                                                                                                                                            |
| Global Product Assessment               | *   Through Our Environmental Guarantee, Shaw Pledges to Transport And Recycle Any Shaw Manufactured Resilient Within The United States And Canada At No Cost to The Customer.<br>GSA   Approved<br>CE Marking (EN 14041)   3rd Party Certified<br>Country of Origin   United States |

## Works With WELL | WELL V2 Contribution Credit

X01 Fundamental Material Precautions  
Part 1: (C): Restrict Asbestos Precondition

X08 Hazardous Material Reduction  
Part 1: Limit Hazardous Materials Optimization

X10 Volatile Compound Reduction  
Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization

X10 Volatile Compound Reduction  
Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization

X11 Long Term Emissions Control  
Part 2: Flooring Optimization

X14 Material Transparency  
Part 1: Promote Ingredient Disclosure Optimization

**Absence of Asbestos**

**Absence of Heavy Metals**

**Absence of Halogenated Flame Retardants**

**Ortho-Phthalates**

**FloorScore Certified**

**Health Product Declaration (HPD) | 1000 Ppm Disclosure**

## Leed v4 Contribution Credits

MR Credit: Building Product Disclosure and Optimization  
Material Ingredients - Option 1: Material Ingredient Reporting

MR Credit: Building Product Disclosure and Optimization  
Environmental Product Declarations - Option 1: Environmental Product Declaration (EPD)

EQ Credit: Low Emitting Materials  
Option 1: Product Category Calculations

**Health Product Declaration (HPD) | 1000 Ppm Disclosure**

**3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017**

**FloorScore Certified**

## Additional Information

\* To learn more about the recyclability of our products and our Environmental Guarantee, please visit [shawcontract.com/sustainability](http://shawcontract.com/sustainability).

\*\*Meets or exceeds all local and national regulations in country of manufacture.

[Installation Guidelines](#)

[Maintenance Guidelines](#)

Please visit [www.shawcontract.com](http://www.shawcontract.com) for the most current warranty information. Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit [shawcontract.com/testing](http://shawcontract.com/testing) for more information.

## Available Colorways







Ink 00450  
V2 - Slight Variation



Poplar 00515  
V3 - Moderate Variation



Slate 00540  
V2 - Slight Variation



Shade 00564  
V2 - Slight Variation



Root 00568  
V3 - Moderate Variation



Timber 00572  
V2 - Slight Variation



Graphite 00580  
V2 - Slight Variation



Terra 00600  
V2 - Slight Variation



Redwood 00650  
V2 - Slight Variation



Taun 00660  
V3 - Moderate Variation



Pirch 00684  
V2 - Slight Variation



Natural 00710  
V2 - Slight Variation



Lodge 00740  
V2 - Slight Variation



Elm 00761  
V3 - Moderate Variation



Grove 00769  
V3 - Moderate Variation



Nest 00774  
V2 - Slight Variation



Echo 00775  
LRV 26.3 | L\* 58.27  
V2 - Slight Variation



Cherry 00850  
V2 - Slight Variation



Violet 00965  
V2 - Slight Variation



Summit 05012  
V3 - Moderate Variation



Orchard 05013  
LRV 35.7 | L\* 66.29  
V2 - Slight Variation



Lark 05016  
LRV 8.6 | L\* 35.15  
V3 - Moderate Variation



Aspen 05019  
V3 - Moderate Variation



Sequoia 07003  
V3 - Moderate Variation



Sumac 07004  
V3 - Moderate Variation



Alder 07005  
V3 - Moderate Variation



Thicket 07008  
V3 - Moderate Variation

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

V1



Uniform Appearance

V2



Slight Variation

V3



Moderate Variation

V4



Substantial Variation

